

Product Contents

产品目录

普通型单组系列 Single Series

S-15W	
S-25W	
S-35W	
S-40W	
S-50W	
S-60W	
S-75W	01
S-100W	
S-120W	
S-150W	
S-200W	
S-250W	02
S-320W	
S-350W	
S-400W	
S-500W	
S-600W	
S-800W	03

普通型多组系列 Mutiple Series

D-30W	
D-50W	
D-60W	
D-120W	
T-30W	
T-50W	
T-60W	04
T-120W	
Q-60W	
Q-120W	

PFC单组系列 PFC Series

SP-150W	
SP-200W	05
SP-320W	
SP-500W	
SCN-800W	
SCN-1000W	
SCN-1200W	
SCN-1600W	06

迷你型单组系列 Mini Size

MSF-10W	
MSF-20W	
MS-15W	
MS-25W	
MS-35W	
MS-40W	07
MS-50W	
MS-60W	
MS-75W	
MS-100W	

MS-120W	
MS-150W	
MS-200W	08
MS-250W	
MS-350W	
MS-400W	
MS-500W	
MS-50E	09
MS-100E	
MS-120E	
MS-150E	
MS-200E	

UPS充电系列 UPS battery charger series

SC-35W	
SC-60W	10
SC-120W	
AD-55W	
AD-155W	
ADD-55W	
ADD-155W	
ADS-155W	11

高效型单组系列 High effi Series

NES-15W	
NES-25W	
NES-35W	
NES-50W	
NES-75W	
NES-100W	12
NES-120W	
NES-150W	
NES-200W	
NES-250W	
NES-350W	
NES-480W	13

导轨型单组系列 Din Rail series

DR-45W	
DR-60W	
DR-75W	
DR-120W	
DR-240W	
DR-480W	14

LED防水恒压系列 Waterproof Series(CV)

LPV-12W	
LPV-20W	
LPV-30W	
LPV-50W	
LPV-60W	
LPV-80W	15
LPV-100W	
LPV-120W	

LPV-150W	
LPV-200W	
LPV-250W	
LPV-300W	16

LED防水恒压系列 Waterproof Series(CV)

LPV-20E	
LPV-35E	
LPV-60E	
LPV-100E	

LED防水恒流系列 Waterproof Series(CC)

LPC-25W	
LPC-35W	17
LPC-60W	
LPC-100W	

LED防水PFC恒流系列 Waterproof Series(PFC)

LPF-20W	
LPF-30W	
LPF-45W	
LPF-60W	18
LPF-100W	

LED防水PFC可调系列 Adj Series with PFC

CEN-60W	
CEN-75W	
CEN-100W	
CEN-120W	
CEN-150W	19
HLG-100W	
HLG-120W	
HLG-150W	
HLG-185W	
HLG-240W	
HLG-320W	20

LED防雨型系列 Rainproof Series

FS-100W	
FS-150W	
FS-200W	
FS-250W	
FS-350W	
FS-400W	21

基板式系列 Open-frame series

PS-25W	
PS-45W	
PS-65W	
PD-25W	
PD-45W	
PD-65W	22

产品外形与安装尺寸对照图 Drawings

	23-28
--	-------

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 折层型电流限制,自动恢复
115~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.3kg/60pcs/19kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-15-5	5V, 0~3A	± 2%	80mV	68%
S-15-12	12V, 0~1.3A	± 1%	100mV	70%
S-15-24	24V, 0~0.7A	± 1%	120mV	74%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 折层型电流限制,自动恢复
105~135% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.3kg/60pcs/19kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-25-12	12V, 0~2.1A	± 1%	100mV	70%
S-25-15	15V, 0~1.7A	± 1%	100mV	71%
S-25-24	24V, 0~1.1A	± 1%	120mV	74%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 折层型电流限制,自动恢复
115~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute


工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.36kg/45pcs/17kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-35-5	5V, 0~7A	± 2%	100mV	72%
S-35-12	12V, 0~3A	± 1%	120mV	76%
S-35-15	15V, 0~2.4A	± 1%	120mV	76%
S-35-24	24V, 0~1.5A	± 1%	120mV	78%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 折层型电流限制,自动恢复
115~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.36kg/45pcs/17kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-40-12	12V, 0~3.5A	± 1%	120mV	75%
S-40-15	15V, 0~2.8A	± 1%	120mV	76%
S-40-24	24V, 0~1.8A	± 1%	150mV	78%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 折层型电流限制,自动恢复
115~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.45kg/30pcs/15.5kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-50-5	5V, 0~10A	± 2%	100mV	76%
S-50-12	12V, 0~4.2A	± 1%	120mV	79%
S-50-15	15V, 0~3.4A	± 1%	120mV	79%
S-50-24	24V, 0~2.1A	± 1%	120mV	82%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 折层型电流限制,自动恢复
105~135% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.45kg/30pcs/15.5kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-60-12	12V, 0~5A	± 1%	100mV	79%
S-60-15	15V, 0~4A	± 1%	120mV	80%
S-60-24	24V, 0~2.5A	± 1%	120mV	82%

普通型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 120~373VDC

过载保护 Over load protection
115~150% 打嗝模式, 自动恢复
115~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式, 自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.55kg/30pcs/18.5kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-75-5	5V, 0~15A	± 2%	80mV	79%
S-75-12	12V, 0~6.3A	± 1%	100mV	82%
S-75-15	15V, 0~5A	± 1%	100mV	82%
S-75-24	24V, 0~3.2A	± 1%	120mV	84%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 切断输出, 重启恢复
115~150% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.57kg/30pcs/18kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-100-5	5V, 0~20A	± 2%	100mV	78%
S-100-12	12V, 0~8.5A	± 1%	120mV	80%
S-100-15	15V, 0~6.7A	± 1%	120mV	80%
S-100-24	24V, 0~4.5A	± 1%	150mV	82%
S-100-48	48V, 0~2A	± 1%	150mV	83%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 切断输出, 重启恢复
115~150% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.57kg/30pcs/18kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-120-12	12V, 0~10A	± 1%	100mV	81%
S-120-15	15V, 0~8A	± 1%	100mV	81%
S-120-24	24V, 0~5A	± 1%	150mV	82%
S-120-48	48V, 0~2.5A	± 1%	150mV	84%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 切断输出, 重启恢复
115~150% cut off the output, restart

过电压保护 Over-voltage protection
115~135% 打嗝模式, 自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.65kg/30pcs/20.5kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-150-5	5V, 0~25A	± 2%	100mV	78%
S-150-12	12V, 0~12A	± 1%	150mV	80%
S-150-15	15V, 0~9.7A	± 1%	150mV	80%
S-150-24	24V, 0~6A	± 1%	150mV	82%
S-150-48	48V, 0~3A	± 1%	150mV	83%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 定电流限制, 自动恢复
115~150% constant current, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式, 自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
≥85°C ± 5°C 切断输出, 自动恢复
≥85°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.83kg/20pcs/19kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-200-5	5V, 0~40A	± 2%	120mV	78%
S-200-12	12V, 0~16.5A	± 1%	150mV	80%
S-200-24	24V, 0~8.3A	± 1%	180mV	82%
S-200-27	27V, 0~7.4A	± 1%	180mV	82%
S-200-48	48V, 0~4.2A	± 1%	200mV	83%

普通型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 定电流限制, 自动恢复
105~135% constant current, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式, 自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
≥85°C ± 5°C 切断输出, 自动恢复
≥85°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.83kg/20pcs/19kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-250-12	12V, 0~20A	± 1%	120mV	80%
S-250-15	15V, 0~16A	± 1%	150mV	80%
S-250-24	24V, 0~10A	± 1%	150mV	82%
S-250-27	27V, 0~9A	± 1%	150mV	82%
S-250-48	48V, 0~5.2A	± 1%	200mV	83%

普通型单组输出



CASE: P23-06 215 x 115 x 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 定电流限制,自动恢复
105~135% constant current, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
≥85℃ ± 5℃ 切断输出,自动恢复
≥85℃ ± 5℃ cut off the output, auto-recovery

风扇开/关控制 Fan ON / OFF control
≥55℃风扇开, ≤50℃风扇关
≥55℃ Fan start, ≤50℃ Fan off

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10℃~+60℃, 20%~90%RH

重量/包装 Weight/packing
0.95kg/20pcs/21kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-320-12	12V, 0~26.7A	± 1%	100mV	80%
S-320-15	15V, 0~21.3A	± 1%	150mV	80%
S-320-24	24V, 0~13.3A	± 1%	150mV	82%
S-320-27	27V, 0~11A	± 1%	150mV	82%
S-320-48	48V, 0~6.5A	± 1%	200mV	83%

普通型单组输出



CASE: P23-06 215 x 115 x 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 定电流限制,自动恢复
105~135% constant current, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
≥85℃ ± 5℃ 切断输出,自动恢复
≥85℃ ± 5℃ cut off the output, auto-recovery

风扇开/关控制 Fan ON / OFF control
≥55℃风扇开, ≤50℃风扇关
≥55℃ Fan start, ≤50℃ Fan off

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10℃~+60℃, 20%~90%RH

重量/包装 Weight/packing
0.95kg/20pcs/21kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-350-5	5V, 0~50A	± 2%	100mV	78%
S-350-12	12V, 0~29A	± 1%	150mV	80%
S-350-15	15V, 0~23.2A	± 1%	150mV	80%
S-350-24	24V, 0~14.6A	± 1%	150mV	82%
S-350-27	27V, 0~13A	± 1%	150mV	82%
S-350-48	48V, 0~7.3A	± 1%	200mV	83%

普通型单组输出



CASE: P23-06 215 x 115 x 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 定电流限制,自动恢复
105~135% constant current, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
≥85℃ ± 5℃ 切断输出,自动恢复
≥85℃ ± 5℃ cut off the output, auto-recovery

风扇开/关控制 Fan ON / OFF control
≥55℃风扇开, ≤50℃风扇关
≥55℃ Fan start, ≤50℃ Fan off

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10℃~+60℃, 20%~90%RH

重量/包装 Weight/packing
1.0kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-400-5	5V, 0~60A	± 2%	100mV	78%
S-400-12	12V, 0~33A	± 1%	150mV	80%
S-400-15	15V, 0~27A	± 1%	150mV	80%
S-400-24	24V, 0~17A	± 1%	150mV	82%
S-400-48	48V, 0~8.3A	± 1%	200mV	83%

普通型单组输出



CASE: P25-19 238 x 124 x 65mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
95~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 切断输出,重新启动
105~135% cut off the output, restart

过电压保护 Over-voltage protection
115~135%切断输出,重新启动
115~135% cut off the output, restart

过温保护 Over- temp protection
整流管温度 ≥85℃ ± 5℃ 切断输出,自动恢复
Rectifier temperature ≥85℃ ± 5℃ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10℃~+60℃, 20%~90%RH

重量/包装 Weight/packing
1.5kg/12pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-500-12	12V, 0~40A	± 1%	100mV	82%
MS-500-15	15V, 0~32A	± 1%	150mV	84%
MS-500-24	24V, 0~20A	± 1%	150mV	84%
MS-500-48	48V, 0~10A	± 1%	150mV	85%

普通型单组输出



CASE: P25-19 238 x 124 x 65mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
95~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 切断输出,重新启动
105~135% cut off the output, restart

过电压保护 Over-voltage protection
115~135%切断输出,重新启动
115~135% cut off the output, restart

过温保护 Over- temp protection
整流管温度 ≥85℃ ± 5℃ 切断输出,自动恢复
Rectifier temperature ≥85℃ ± 5℃ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10℃~+60℃, 20%~90%RH

重量/包装 Weight/packing
1.5kg/12pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-600-12	12V, 0~50A	± 1%	150mV	82%
MS-600-15	15V, 0~40A	± 1%	150mV	82%
MS-600-24	24V, 0~25A	± 1%	180mV	84%
MS-600-48	48V, 0~12.5A	± 1%	200mV	86%

普通型单组输出



CASE: P23-07 247 x 127 x 63.5mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132/180~264VAC 47~63Hz; 255~373VDC

过载保护 Over load protection
115~135% 切断输出, 重新启动
115~135% cut off the output, restart

过电压保护 Over-voltage protection
115~135% 切断输出, 重新启动
115~135% cut off the output, restart

过温保护 Over- temp protection
整流管 ≥85℃ ± 5℃ 切断输出, 自动恢复
Rectifier ≥85℃ ± 5℃ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC I/P-FG: 1.5KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10℃~+65℃, 20%~90%RH

重量/包装 Weight/packing
2kg/9pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
S-800-12	12V, 0~66A	± 1%	200mV	80%
S-800-15	15V, 0~53A	± 1%	200mV	81%
S-800-24	24V, 0~33A	± 1%	240mV	84%
S-800-48	48V, 0~16.5A	± 1%	300mV	84%

普通型双组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 折层型电流限制,自动恢复
110~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.4Kg/ 45pcs/19Kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
D-30A	5V, 0.5~4A 12V, 0.2~1A	±2% +3~-7%	80mV 100mV	73%
D-30B	5V, 0.4~2.2A 24V, 0.1~1A	±2% +4~-6%	80mV 100mV	75%

普通型双组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 折层型电流限制,自动恢复
110~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.52Kg/30pcs/17.6Kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
D-50A	5V, 0.8~6A 12V, 0.3~2A	±2% +4~-8%	80mV 100mV	73%
D-50B	5V, 0.8~4A 24V, 0.2~1.5A	±3% +6~-8%	80mV 120mV	75%

普通型双组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz 127~373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.55Kg/30pcs/17.6Kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
D-60A	5V, 0.8~4A 12V, 0.3~3A	±2% +4~-8%	80mV 100mV	74%
D-60B	5V, 0.8~3A 24V, 0.2~1.8A	±3% +6~-8%	80mV 120mV	76%

普通型双组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 切断输出,重启恢复
110~150% cut off the output, restart

过电压保护 Over-voltage protection
115~135% 切断输出,重启恢复
115~135% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.85Kg/20pcs/19Kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
D-120A	5V, 2~12A 12V, 0.5~5A	±2% +5~-8%	80mV 120mV	78%
D-120B	5V, 1~6A 24V, 0.4~4A	±3% +6~-8%	80mV 150mV	80%

普通型三组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 折层型电流限制,自动恢复
110~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute


工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.4Kg/45pcs/19Kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
T-30A	5V, 0.6~3A 12V, 0.1~1A -5V, 0.1~0.5A	±2% +4~-6% +5~-10%	80mV 100mV 100mV	73%
T-30B	5V, 0.6~3A 12V, 0.1~1A -12V, 0.1~0.5A	±2% +4~-6% +5~-10%	80mV 100mV 100mV	74%

普通型三组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 折层型电流限制,自动恢复
110~150% fold back current limiting,
auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.54Kg/30pcs/18.2Kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
T-50A	5V, 0.8~6A 12V, 0.2~1A -5V, 0.2~1A	±2% ±5% ±5%	80mV 100mV 80mV	73%
T-50B	5V, 0.8~5A 12V, 0.2~1A -12V, 0.2~1A	±2% ±5% ±5%	80mV 100mV 100mV	74%

普通型三组输出



质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 127~373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.56Kg/30pcs/18.2Kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
T-60A	5V, 0.6~5A	±2%	80mV	73%
	12V, 0.2~2.5A	±6%	100mV	
	-5V, 0~0.5A	±3%	80mV	
T-60B	5V, 0.6~5A	±2%	80mV	74%
	12V, 0.2~2.5A	±6%	100mV	
	-12V, 0~0.5A	±3%	100mV	

普通型四组输出



质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 127~373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.5Kg/30pcs/17Kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
Q-60B	5V, 0.8~5.5A	±2%	80mV	71%
	12V, 0.4~2A	±6%	120mV	
	-5V, 0~0.5A	±5%	800mV	
Q-60D	-12V, 0~0.5A	±5%	120mV	72%
	5V, 0.8~4A	±2%	80mV	
	12V, 0.4~1A	±6%	120mV	
	24V, 0.1~1A	±5%	80mV	
	-12V, 0.1~0.5A	±5%	120mV	

PFC单组输出



质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~263VAC 47~63Hz, 125~370VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~150% 切断输出,重启恢复
115~150% cut off the output, restart

过温保护 Over-temp protection
TSW1≥95°C±5°C 切断输出,自动恢复
TSW1≥95°C±5°C cut off the output, auto-recovery

功率因数 Power Factor
PF>0.95/230VAC, PF>0.98/115VAC, 输出满载
PF>0.95/230VAC, PF>0.98/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 I/P-FG:1.5KvAC 1
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.7kg/24pcs/17.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SP-150-5	5V, 0~30A	±2%	150mV	80%
SP-150-12	12V, 0~12.5A	±1%	150mV	86%
SP-150-24	24V, 0~6.3A	±1%	180mV	87%

普通型三组输出



质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 切断输出,重启恢复
110~150% cut off the output, restart

过电压保护 Over-voltage protection
115~135% 切断输出,重启恢复
115~135% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.85Kg/20pcs/19Kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
T-120A	5V, 2~11A	±2%	80mV	77%
	12V, 0.5~5A	±6%	120mV	
	-5V, 0.2~1A	±6%	80mV	
T-120B	5V, 2~11A	±2%	80mV	77%
	12V, 0.5~4.5A	±6%	120mV	
	-12V, 0.2~1A	±6%	120mV	

普通型三组输出



质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 切断输出,重启恢复
110~150% cut off the output, restart

过电压保护 Over-voltage protection
115~135% 切断输出,重启恢复
115~135% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.88Kg/20pcs/17.6Kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
Q-120B	5V, 2~12A	±2%	80mV	77%
	12V, 0.5~5A	±6%	120mV	
	-5V, 0.2~1A	±6%	80mV	
	12V, 0.2~1A	±6%	120mV	

PFC单组输出



质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~263VAC 47~63Hz, 125~370VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出,重启恢复
115~135% cut off the output, restart

过温保护 Over-temp protection
TSW1≥95°C±5°C 切断输出,自动恢复
TSW1≥95°C±5°C cut off the output, auto-recovery

功率因数 Power Factor
PF>0.95/230VAC, PF>0.98/115VAC, 输出满载
PF>0.95/230VAC, PF>0.98/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 I/P-FG:1.5KvAC 1
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.8kg/24pcs/20kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SP-200-5	5V, 0~35A	±2%	150mV	80%
SP-200-12	12V, 0~16.5A	±1%	150mV	86%
SP-200-24	24V, 0~8.3A	±1%	180mV	87%

PFC单组输出



CASE: P23-06 215 x 115 x 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 263VAC 47 ~ 63Hz, 125 ~ 370VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出,重启恢复
115~135% cut off the output, restart

过温保护 Over-temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output, auto-recovery

功率因数 Power Factor
PF > 0.95/230VAC, PF > 0.98/115VAC, 输出满载
PF > 0.95/230VAC, PF > 0.98/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3kVAC 1 I/P-FG: 1.5kVAC 1
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90% RH

重量/包装 Weight/packing
1kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SP-320-5	5V, 0~50A	± 2%	150mV	80%
SP-320-12	12V, 0~25A	± 1%	150mV	86%
SP-320-24	24V, 0~12.5A	± 1%	200mV	88%

PFC单组输出



CASE: P24-10 170 x 120 x 93mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 263VAC 47 ~ 63Hz, 125 ~ 370VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output, auto-recovery

功率因数 Power Factor
PF > 0.95/100~240VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3kVAC 1 I/P-FG: 1.5kVAC 1
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90% RH

重量/包装 Weight/packing
1.8kg/8pcs/15kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SP-500-12	12V, 0~40A	± 1%	240mV	84%
SP-500-15	15V, 0~32A	± 1%	240mV	83%
SP-500-24	24V, 0~20A	± 1%	240mV	84%
SP-500-48	48V, 0~10A	± 1%	240mV	86%

PFC单组输出



CASE: P24-11 291 x 132 x 68mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC 180~264VAC 47~63Hz

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output auto-recovery

冲击电流: 冷启动电流25A/115V 50A/230V
AC inrush current: cold-start current 25A/115V 50A/230V

耐压性 Withstand voltage
I/P-O/P: 3kVAC 1 I/P-FG: 1.5kVAC 1
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90% RH

重量/包装 Weight/packing
2.3kg, 6pcs/13.8kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SCN-800-12	12V, 0~66A	± 1%	240mV	84%
SCN-800-15	15V, 0~53A	± 1%	240mV	83%
SCN-800-24	24V, 0~33A	± 1%	240mV	85%
SCN-800-48	48V, 0~16A	± 1%	240mV	87%

PFC单组输出



CASE: P24-11 291 x 132 x 68mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC 180~264VAC 47~63Hz

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output auto-recovery

冲击电流: 冷启动电流25A/115V 50A/230V
AC inrush current: cold-start current 25A/115V 50A/230V

耐压性 Withstand voltage
I/P-O/P: 3kVAC 1 I/P-FG: 1.5kVAC 1
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90% RH

重量/包装 Weight/packing
2.3kg, 6pcs/13.8kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SCN-1000-12	12V, 0~83A	± 1%	240mV	83%
SCN-1000-15	15V, 0~66A	± 1%	240mV	84%
SCN-1000-24	24V, 0~42A	± 1%	240mV	85%
SCN-1000-48	48V, 0~20A	± 1%	300mV	87%

PFC单组输出



CASE: P24-12 291 x 132 x 132mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
190~230VAC 47~63Hz

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output auto-recovery

冲击电流: 冷启动电流25A/115V 50A/230V
AC inrush current: cold-start current 25A/115V 50A/230V

耐压性 Withstand voltage
I/P-O/P: 3kVAC 1 I/P-FG: 1.5kVAC 1
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90% RH

重量/包装 Weight/packing
6.4kg, 2pcs/14.8kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SCN-1200-12	12V, 0~100A	± 1%	240mV	83%
SCN-1200-15	15V, 0~80A	± 1%	240mV	84%
SCN-1200-24	24V, 0~50A	± 1%	240mV	85%
SCN-1200-48	48V, 0~25A	± 1%	300mV	87%

PFC单组输出



CASE: P24-12 291 x 132 x 132mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
190~264VAC 47~63Hz 120~370VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output auto-recovery

冲击电流: 冷启动电流25A/115V 50A/230V
AC inrush current: cold-start current 25A/115V 50A/230V

耐压性 Withstand voltage
I/P-O/P: 3kVAC 1 I/P-FG: 1.5kVAC 1
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90% RH

重量/包装 Weight/packing
6.4kg, 2pcs/14.8kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SCN-1600-12	12V, 0~133A	± 1%	240mV	83%
SCN-1600-15	15V, 0~106A	± 1%	240mV	84%
SCN-1600-24	24V, 0~66A	± 1%	240mV	85%
SCN-1600-48	48V, 0~33A	± 1%	300mV	87%

迷你型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 125~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
125~150% 打嗝模式,自动恢复
125~150% hiccup mode, auto-recovery

过温保护 Over-temp protection
晶体管内部温度 ≥ 150°C,打嗝模式,自动恢复
When temperature of transistor inner node is over 150°C, hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5kVAC 1 minute
I/P-FG: 1.5kVAC 1 minute
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.08kg/200pcs/17kg

迷你型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 125~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
125~150% 打嗝模式,自动恢复
125~150% hiccup mode, auto-recovery

过温保护 Over-temp protection
晶体管内部温度 ≥ 150°C,打嗝模式,自动恢复
When temperature of transistor inner node is over 150°C, hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5kVAC 1 minute
I/P-FG: 1.5kVAC 1 minute
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.11kg/160pcs/18.5kg

质保期2年

2 Years Warranty

质保期2年

2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MSF-10-5	5V, 0~2A	± 2%	80mV	76%
MSF-10-9	9V, 0~1.1A	± 1%	120mV	79%
MSF-10-12	12V, 0~1A	± 1%	120mV	79%
MSF-10-24	24V, 0~0.5A	± 1%	120mV	81%

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MSF-20-5	5V, 0~4A	± 2%	80mV	75%
MSF-20-12	12V, 0~1.7A	± 1%	120mV	78%
MSF-20-24	24V, 0~0.8A	± 1%	120mV	80%

迷你型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 135~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5kVAC 1 minute
I/P-FG: 1.5kVAC 1 minute
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.15kg/100pcs/16kg

质保期2年

2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-15-5	5V, 0~3A	± 2%	80mV	78%
MS-15-12	12V, 0~1.3A	± 2%	120mV	81%
MS-15-24	24V, 0~0.7A	± 1.5%	150mV	83%

迷你型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 135~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5kVAC 1 minute
I/P-FG: 1.5kVAC 1 minute
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH


重量/包装 Weight/packing
0.15kg/100pcs/16kg

质保期2年

2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-25-12	12V, 0~2.1A	± 2%	100mV	81%
MS-25-15	15V, 0~1.7A	± 2%	100mV	82%
MS-25-24	24V, 0~1.1A	± 1.5%	120mV	83%

迷你型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 135~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5kVAC 1 minute
I/P-FG: 1.5kVAC 1 minute
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.18kg/100pcs/19kg

质保期2年

2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-35-5	5V, 0~5A	± 3%	80mV	78%
MS-35-12	12V, 0~3A	± 2%	100mV	81%
MS-35-15	15V, 0~2.4A	± 2%	100mV	82%
MS-35-24	24V, 0~1.5A	± 2%	120mV	83%

迷你型单组输出



输入电压范围 AC input voltage range
90~264VAC 47~63Hz; 135~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5kVAC 1 minute
I/P-FG: 1.5kVAC 1 minute
O/P-FG: 0.5kVAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C, 20%~90%RH


重量/包装 Weight/packing
0.18kg/100pcs/19kg

质保期2年

2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-40-12	12V, 0~3.4A	± 2%	100mV	81%
MS-40-15	15V, 0~2.8A	± 2%	100mV	82%
MS-40-24	24V, 0~1.7A	± 1.5%	120mV	83%

迷你型单组输出



CASE: P25-17 111 x 78 x 36mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.27kg/60pcs/18.2kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-50-5	5V, 0~7A	±2%	80mV	80%
MS-50-12	12V, 0~4.2A	±1%	120mV	82%
MS-50-15	15V, 0~3.4A	±1%	120mV	82%
MS-50-24	24V, 0~2.1A	±1%	120mV	84%

迷你型单组输出



CASE: P25-17 111 x 78 x 36mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.27kg/60pcs/18.2kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-60-12	12V, 0~5A	±1%	100mV	82%
MS-60-15	15V, 0~4A	±1%	120mV	82%
MS-60-24	24V, 0~2.5A	±1%	120mV	84%

迷你型单组输出



CASE: P25-17 111 x 78 x 36mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.3kg/60pcs/20kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-75-5	5V, 0~10A	±2%	80mV	80%
MS-75-12	12V, 0~6.3A	±1%	120mV	82%
MS-75-15	15V, 0~5A	±1%	120mV	82%
MS-75-24	24V, 0~3.2A	±1%	120mV	84%

迷你型单组输出



CASE: P23-03 159 x 97 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery


耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.48kg/30pcs/16.4kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-100-5	5V, 0~20A	±2%	80mV	79%
MS-100-12	12V, 0~8.3A	±1%	120mV	83%
MS-100-15	15V, 0~6.7A	±1%	120mV	84%
MS-100-24	24V, 0~4.2A	±1%	150mV	85%
MS-100-48	48V, 0~2A	±1%	200mV	86%

迷你型单组输出



CASE: P23-03 159 x 97 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.48kg/30pcs/16.4kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-120-12	12V, 0~10A	±1%	100mV	82%
MS-120-15	15V, 0~8A	±1%	120mV	83%
MS-120-24	24V, 0~5A	±1%	150mV	85%
MS-120-27	27V, 0~4.5A	±1%	150mV	85%
MS-120-48	48V, 0~2.5A	±1%	200mV	86%

迷你型单组输出



CASE: P23-03 159 x 97 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery


耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.5kg/30pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-150-12	12V, 0~12.5A	±1%	100mV	83%
MS-150-15	15V, 0~10A	±1%	120mV	83%
MS-150-24	24V, 0~6.5A	±1%	150mV	85%
MS-150-27	27V, 0~5.6A	±1%	150mV	86%
MS-150-48	48V, 0~3.2A	±1%	200mV	86%

迷你型单组输出



CASE: P23-04 199 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.6kg/30pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-200W-5	5V, 0~30A	±2%	150mV	80%
MS-200W-12	12V, 0~16.6A	±1%	150mV	83%
MS-200W-15	15V, 0~13.3A	±1%	150mV	83%
MS-200W-24	24V, 0~8.3A	±1%	180mV	85%
MS-200W-48	48V, 0~4.2A	±1%	200mV	86%

迷你型单组输出



CASE: P24-09 199 x 99 x 48mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C±5°C 切断输出,自动恢复
TSW1≥85°C±5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.8kg/24pcs/20kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-350-5	5V, 0~50A	±2%	150mV	80%
MS-350-12	12V, 0~29A	±1%	150mV	82%
MS-350-15	15V, 0~23A	±1%	150mV	82%
MS-350-24	24V, 0~14.6A	±1%	200mV	84%
MS-350-27	24V, 0~13A	±1%	200mV	84%
MS-350-48	48V, 0~7.3A	±1%	200mV	84%

迷你型单组输出



CASE: P23-06 215 x 115 x 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%切断输出,自动恢复
115~135% cut off the output, auto-recovery

过温保护 Over-temp protection
≥85°C 切断输出,自动恢复
≥85°C cut off the output, auto-recovery

风扇开/关控制 Fan ON / OFF control
≥55°C风扇开, ≤45°C风扇关
≥55°C Fan start, ≤45°C Fan off

耐压性 Withstand voltage
I/P-O/P:3KvAC I/P-FG:1.5KvAC
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C,20%~90%RH

重量/包装 Weight/packing
1kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-500-12	12V, 0~40A	±1%	150mV	84%
MS-500-24	24V, 0~20A	±1%	180mV	86%
MS-500-48	48V, 0~10A	±1%	240mV	87%

迷你型单组输出



CASE: P25-18 199 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥95°C±5°C 打嗝模式,自动恢复
TSW1≥95°C±5°C hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.65kg/30pcs/20.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-250W-12	12V, 0~20A	±2%	150mV	84%
MS-250W-24	24V, 0~10A	±1%	180mV	86%

迷你型单组输出



CASE: P24-09 199 x 99 x 48mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C±5°C 切断输出,自动恢复
TSW1≥85°C±5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.8kg/24pcs/20kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-400-5	5V, 0~60A	±2%	100mV	78%
MS-400-12	12V, 0~33A	±1%	150mV	80%
MS-400-15	15V, 0~27A	±1%	150mV	80%
MS-400-24	24V, 0~17A	±1%	150mV	82%
MS-400-48	48V, 0~8.3A	±1%	200mV	83%

迷你型单组输出



CASE: P24-15 84 x 58 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery


耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.18kg/100pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-50E-12	12V, 0~4.2A	±1%	120mV	82%
MS-50E-24	24V, 0~2.1A	±1%	120mV	84%

迷你型单组输出



CASE: P23-02 129 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz 125~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery


耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.40kg/45pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-100E-12	12V,0~8.3A	±1%	120mV	83%
MS-100E-24	24V,0~4.2A	±1%	150mV	85%

迷你型单组输出



CASE: P23-02 129 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery


耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.43kg/45pcs/20.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-120E-12	12V,0~10A	±1%	100mV	83%
MS-120E-24	24V,0~5A	±1%	150mV	85%

迷你型单组输出



CASE: P23-02 129 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.43kg/45pcs/20.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-150E-12	12V,0~12.5A	±1%	100mV	83%
MS-150E-24	24V,0~6.5A	±1%	150mV	86%

迷你型单组输出



CASE: P23-03 159 x 97 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.52kg/30pcs/17.6kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
MS-200E-12	12V,0~16.6A	±1%	150mV	83%
MS-200E-24	24V,0~8.3A	±1%	180mV	85%

UPS充电型



CASE: P27-38 111 x 78 x 36mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz,127~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.28kg/60pcs/18.8kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SC-35-12	CH1:13.8V 0~2A CH2:13.4V 0.5A	±2%	120mV	81%
SC-35-24	CH1:27.6V 0~1A CH2:26.5V 0.3A	±1%	120mV	83%

UPS充电型



CASE: P27-39 129 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz,127~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V


耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~+60°C,20%~90%RH

重量/包装 Weight/packing
0.4kg/45pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SC-60-12	CH1:13.8V 0~4A CH2:13.4V 0.35A	±1%	100mV	81%
SC-60-24	CH1:27.6V 0~2A CH2:26.5V 0.25A	±1%	100mV	83%

UPS充电型



CASE: P27-40 159 × 97 × 38mm

输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.5kg/30pcs/16kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
SC-120-12	CH1:13.8V 0~8A CH2:13.4V 0.5A	±1%	120mV	84%
SC-120-24	CH1:27.6V 0~4A CH2:26.5V 0.3A	±1%	180mV	86%

UPS充电型



CASE: P24-13 199 × 110 × 50mm

输入电压范围 AC input voltage range
90~264VAC/47~63Hz
124~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.9kg/20pcs/20kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
AD-155A	CH1:13.8V 0~10.5A CH2:13.4V 0.5A	±1%	150mV	80%
AD-155B	CH1:27.6V 0~5A CH2:26.5V 0.5A	±1%	150mV	84%
AD-155C	CH1:54V 0~2.7A CH2:53.5V 0.2A	±1%	240mV	84%

UPS充电型



CASE: P24-13 199 × 110 × 50mm

输入电压范围 AC input voltage range
90~264VAC/47~63Hz
124~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.9kg/20pcs/20kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
ADD-155A	CH1:13.8V 0~9.5A CH2:5V 0~3A CH3:13.3V 0~0.5A	±1%	100mV	80%
ADD-155B	CH1:27.6V 4.5A CH1:5V 0~3A CH3:27.1V 0.5A	±1%	100mV	84%

UPS充电型



CASE: P23-02 129 × 98 × 38mm

输入电压范围 AC input voltage range
90~264VAC/47~63Hz
124~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.5kg/45pcs/24.5kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
AD-55A	CH1:13.8V 0~3.5A CH2:13.4V 0.23A	±1%	120mV	84%
AD-55B	CH1:27.6V 0~1.8A CH2:26.5V 0.16A	±1%	180mV	86%

UPS充电型



CASE: P23-02 129 × 98 × 38mm

输入电压范围 AC input voltage range
90~264VAC/47~63Hz
124~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.5kg/45pcs/24.5kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
ADD-55A	CH1:13.8V 0~2.5A CH2:5V 0~3A CH3:13.4V 0~0.23A	±1%	100mV	80%
ADD-55B	CH1:27.6V 0~1.3A CH2:5V 0~3A CH3:26.5V 0.16A	±1%	100mV	82%

UPS充电型



CASE: P24-13 199 × 110 × 50mm

输入电压范围 AC input voltage range
90~264VAC/47~63Hz
124~370VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

电池低压保护 Battery Protection At Low Voltage
CH2:9.5~11V,CH2:20~22V

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.9kg/20pcs/20kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
ADS-15512	CH1:12V 0~11.5A CH2:5V 0~3A	±1%	100mV	77%
ADS-15524	CH1:24V 0~5.8A CH2:5V 0~3A	±1%	150mV	82%
ADS-15548	CH1:48V 0~2.9A CH2:5V 0~3A	±1%	240mV	82%

高效型单组输出



CASE: P24-15 84 x 58 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 125 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.15kg/100pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-15-5	5V, 0~3A	± 2%	80mV	78%
NES-15-12	12V, 0~1.3A	± 1%	120mV	83%
NES-15-24	24V, 0~0.7A	± 1%	200mV	86%

高效型单组输出



CASE: P24-15 84 x 58 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 125 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.15kg/100pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-25-5	5V, 0~5A	± 2%	80mV	78%
NES-25-12	12V, 0~2.1A	± 1%	120mV	83%
NES-25-24	24V, 0~1.1A	± 1%	200mV	86%

高效型单组输出



CASE: P23-01 99 x 97 x 35mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 125 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.3kg/60pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-35-5	5V, 0~7A	± 2%	80mV	78%
NES-35-12	12V, 0~3A	± 1%	120mV	81%
NES-35-24	24V, 0~1.5A	± 1%	200mV	85%

高效型单组输出



CASE: P23-02 129 x 98 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 120 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.36kg/45pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-50-5	5V, 0~10A	± 2%	80mV	79%
NES-50-12	12V, 0~4.2A	± 1%	100mV	82%
NES-50-24	24V, 0~2.1A	± 1%	120mV	84%

高效型单组输出



CASE: P23-03 159 x 97 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 120 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.48kg/30pcs/16.4kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-75-5	5V, 0~15A	± 2%	80mV	79%
NES-75-12	12V, 0~6.3A	± 1%	100mV	82%
NES-75-24	24V, 0~3.2A	± 1%	120mV	84%

高效型单组输出



CASE: P23-03 159 x 97 x 38mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 120 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C;20% ~ 90%RH

重量/包装 Weight/packing
0.48kg/30pcs/16.4kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-100-5	5V, 0~16A	± 2%	80mV	79%
NES-100-12	12V, 0~8.3A	± 1%	100mV	82%
NES-100-24	24V, 0~4.2A	± 1%	120mV	84%

高效型单组输出



输入电压范围 AC input voltage range
90 ~ 132VAC/180 ~ 264Hz或254 ~ 373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90%RH

重量/包装 Weight/packing
0.50kg/30pcs/17kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-120-12	12V, 0~10A	± 1%	100mV	83%
NES-120-24	24V, 0~5A	± 1%	120mV	85%

高效型单组输出



输入电压范围 AC input voltage range
90 ~ 132VAC/180 ~ 264Hz或254 ~ 373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90%RH

重量/包装 Weight/packing
0.6kg/30pcs/19kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-150-5	5V, 0~25A	± 2%	100mV	81%
NES-150-12	12V, 0~12.5A	± 1%	120mV	84%
NES-150-24	24V, 0~6.5A	± 1%	150mV	86%

高效型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 ≥ 95°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 95°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90%RH

重量/包装 Weight/packing
0.72kg/24pcs/18kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-200-5	5V, 0~40A	± 2%	150mV	81%
NES-200-12	12V, 0~16.6A	± 1%	180mV	84%
NES-200-24	24V, 0~8.3A	± 1%	200mV	86%

高效型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 ≥ 95°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 95°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90%RH

重量/包装 Weight/packing
0.72kg/24pcs/18kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-250-12	12V, 0~20A	± 1%	150mV	84%
NES-250-24	24V, 0~10A	± 1%	180mV	85%

高效型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
110~135% 打嗝模式,自动恢复
110~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 ≥ 85°C ± 5°C 切断输出,自动恢复
TSW1 ≥ 85°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90%RH

重量/包装 Weight/packing
0.8kg/24pcs/20kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-350-5	5V, 0~50A	± 2%	150mV	80%
NES-350-12	12V, 0~29A	± 1%	150mV	82%
NES-350-24	24V, 0~14.6A	± 1%	200mV	84%
NES-350-36	36V, 0~9.8A	± 1%	200mV	84%
NES-350-48	48V, 0~7.3A	± 1%	200mV	84%

高效型单组输出



输入电压范围 AC input voltage range
90~132VAC/180~264VAC 47~63Hz
255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%切断输出,自动恢复
115~135% cut off the output, auto-recovery

过温保护 Over- temp protection
≥ 85°C 切断输出,自动恢复
≥ 85°C cut off the output, auto-recovery

风扇开/关控制 Fan ON / OFF control
≥ 55°C 风扇开, ≤ 45°C 风扇关
≥ 55°C Fan start, ≤ 45°C Fan off

耐压性 Withstand voltage
I/P-O/P:3KvAC I/P-FG:1.5KvAC
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20% ~ 90%RH

重量/包装 Weight/packing
1kg/20pcs/22kg

质保期2年
2 Years Warranty

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
NES-480-12	12V, 0~40A	± 1%	150mV	84%
NES-480-15	15V, 0~32A	± 1%	150mV	84%
NES-480-24	24V, 0~20A	± 1%	180mV	86%
NES-480-48	48V, 0~10A	± 1%	240mV	87%

导轨型单组输出



CASE: P28-41 78 x 93 x 56mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz, 127 ~ 373VDC

过载保护 Over load protection
105~150% 打嗝模式,自动恢复
105~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~150% 关断输出, 用稳压二极管钳位
115~150% Shut off o/p voltage,
clamping by zener diode

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +50°C; 20% ~ 90% RH

重量/包装 Weight/packing
0.27kg/48pcs/14kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
DR-45-5	5V, 0~5A	± 2%	80mV	75%
DR-45-12	12V, 0~3.5A	± 1%	100mV	81%
DR-45-24	24V, 0~2A	± 1%	150mV	83%

导轨型单组输出



CASE: P28-41 78 x 93 x 56mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz, 127 ~ 373VDC

过载保护 Over load protection
105~150% 打嗝模式,自动恢复
105~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~150% 关断输出, 用稳压二极管钳位
115~150% Shut off o/p voltage,
clamping by zener diode

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +50°C; 20% ~ 90% RH

重量/包装 Weight/packing
0.27kg/48pcs/14kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
DR-60-5	5V, 0~6.5A	± 2%	100mV	76%
DR-60-12	12V, 0~4.5A	± 1%	100mV	82%
DR-60-24	24V, 0~2.5A	± 1%	150mV	84%

导轨型单组输出



CASE: P28-42 55.5 x 125 x 100mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz, 127 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~150% 切断输出, 重启恢复
115~150% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +50°C; 20% ~ 90% RH

重量/包装 Weight/packing
0.6kg/24pcs/15.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
DR-75-12	12V, 0~6.3A	± 1%	100mV	79%
DR-75-24	24V, 0~3.2A	± 1%	150mV	81%
DR-75-48	48V, 0~1.6A	± 1%	200mV	84%

导轨型单组输出



CASE: P28-43 65.5 x 125 x 100mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz, 127 ~ 373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~150% 切断输出, 重启恢复
115~150% cut off the output, restart

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +50°C; 20% ~ 90% RH

重量/包装 Weight/packing
0.8kg/24pcs/20kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
DR-120-12	12V, 0~8.3A	± 1%	100mV	82%
DR-120-24	24V, 0~5.0A	± 1%	120mV	84%
DR-120-48	48V, 0~2.5A	± 1%	150mV	85%

导轨型单组输出



CASE: P28-44 125.5 x 125 x 100mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180 ~ 264VAC 47 ~ 63Hz或255 ~ 370VDC

过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% rated current limit, auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出, 重启恢复
115~135% cut off the output, restart

过温保护 Over-temp protection
≥95°C ± 10°C 切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart

功率因数 Power Factor
PF > 0.95/230VAC, 输出满载
PF > 0.95/230VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-30°C ~ +70°C; 20% ~ 90% RH

重量/包装 Weight/packing
1.15kg/12pcs/15kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
DR-240-24	24V, 0~10A	± 1%	120mV	85%
DR-240-36	36V, 0~6.6A	± 1%	150mV	85%
DR-240-48	48V, 0~5A	± 1%	180mV	86%

导轨型单组输出



CASE: P28-44 125.5 x 125 x 100mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180 ~ 264VAC 47 ~ 63Hz或255 ~ 370VDC

过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% rated current limit, auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出, 重启恢复
115~135% cut off the output, restart

过温保护 Over-temp protection
≥95°C ± 10°C 切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart

功率因数 Power Factor
PF > 0.95/230VAC, 输出满载
PF > 0.95/230VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-30°C ~ +70°C; 20% ~ 90% RH

重量/包装 Weight/packing
1.15kg/12pcs/15kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
DR-480-24	24V, 0~20A	± 1%	200mV	86%
DR-480-36	36V, 0~13.3A	± 1%	240mV	88%
DR-480-48	48V, 0~10A	± 1%	240mV	88%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-20 132 x 30 x 20mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz 135~373VDC

过载保护 Over load protection
135~175% 打嗝模式,自动恢复
135~175% hiccup mode, auto-recovery

过温保护 Over- temp protection
晶体管内部温度 $\geq 150^{\circ}\text{C}$,打嗝模式,自动恢复
When temperature of transistor inner node is over 150°C ,hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute

工作温度、湿度 Working temperature
 $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$,20%~90%RH

重量/包装 Weight/packing
0.15kg/100pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-12-12	12V, 0~1A	$\pm 3\%$	120mV	79%
LPV-12-24	24V, 0~0.5A	$\pm 2\%$	150mV	81%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-21 182 x 30 x 20mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 235~373VDC

过载保护 Over load protection
135~175% 打嗝模式,自动恢复
135~175% hiccup mode, auto-recovery

过温保护 Over- temp protection
晶体管内部温度 $\geq 150^{\circ}\text{C}$,打嗝模式,自动恢复
When temperature of transistor inner node is over 150°C ,hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute

工作温度、湿度 Working temperature
 $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$,20%~90%RH

重量/包装 Weight/packing
0.21kg/100pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-20-12	12V, 0~1.7A	$\pm 3\%$	100mV	79%
LPV-20-24	24V, 0~0.8A	$\pm 2\%$	150mV	81%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-22 222 x 30 x 20mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 235~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

过温保护 Over- temp protection
晶体管内部温度 $\geq 150^{\circ}\text{C}$,打嗝模式,自动恢复
When temperature of transistor inner node is over 150°C ,hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute

工作温度、湿度 Working temperature
 $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$,20%~90%RH

重量/包装 Weight/packing
0.25kg/100pcs/26kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-30-12	12V, 0~2.5A	$\pm 3\%$	100mV	80%
LPV-30-24	24V, 0~1.3A	$\pm 2\%$	150mV	82%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-23 190 x 49 x 34mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 235~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

过温保护 Over- temp protection
晶体管内部温度 $\geq 150^{\circ}\text{C}$,打嗝模式,自动恢复
When temperature of transistor inner node is over 150°C ,hiccup mode, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
 $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$,20%~90%RH

重量/包装 Weight/packing
0.5kg/40pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-50-12	12V, 0~4.2A	$\pm 3\%$	100mV	82%
LPV-50-24	24V, 0~2.1A	$\pm 2\%$	150mV	84%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-23 190 x 49 x 34mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz或126~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
 $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$,20%~90%RH

重量/包装 Weight/packing
0.53kg/40pcs/23.2kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-60-12	12V, 0~5A	$\pm 3\%$	100mV	82%
LPV-60-24	24V, 0~2.5A	$\pm 2\%$	150mV	84%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-23 190 x 49 x 34mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz或126~373VDC

过载保护 Over load protection
115~150% 打嗝模式,自动恢复
115~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
 $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$,20%~90%RH

重量/包装 Weight/packing
0.53kg/40pcs/23.2kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-80-12	12V, 0~6.7A	$\pm 3\%$	100mV	82%
LPV-80-24	24V, 0~3.3A	$\pm 2\%$	150mV	84%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P25-24 185 x 69 x 43mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90~264VAC 47~63Hz或126~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20 $^{\circ}\text{C}$ ~+60 $^{\circ}\text{C}$, 20%~90%RH

重量/包装 Weight/packing
0.9kg/20pcs/19kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-100-12	12V, 0~8.5A	$\pm 3\%$	100mV	83%
LPV-100-24	24V, 0~4.2A	$\pm 2\%$	150mV	85%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-26 240 x 69 x 43mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 235~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10 $^{\circ}\text{C}$ ~+60 $^{\circ}\text{C}$, 20%~90%RH

重量/包装 Weight/packing
1.2kg/20pcs/25kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-150-12	12V, 0~12.5A	$\pm 3\%$	120mV	82%
LPV-150-24	24V, 0~6.3A	$\pm 2\%$	150mV	84%
LPV-150-48	48V, 0~3.2A	$\pm 2\%$	180mV	86%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-27 235 x 120 x 56mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180~264VAC 47~63Hz 255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10 $^{\circ}\text{C}$ ~+60 $^{\circ}\text{C}$, 20%~90%RH

重量/包装 Weight/packing
2.45kg/9pcs/23kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-250-12	12V, 0~20A	$\pm 3\%$	150mV	83%
LPV-250-24	24V, 0~10A	$\pm 2\%$	200mV	85%
LPV-250-48	48V, 0~5.2A	$\pm 2\%$	200mV	87%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-25 215 x 69 x 43mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 235~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 85^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10 $^{\circ}\text{C}$ ~+60 $^{\circ}\text{C}$, 20%~90%RH

重量/包装 Weight/packing
1.05kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-120-12	12V, 0~10A	$\pm 3\%$	100mV	82%
LPV-120-24	24V, 0~5A	$\pm 2\%$	150mV	84%
LPV-120-48	48V, 0~2.5A	$\pm 2\%$	150mV	85%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-26 240 x 69 x 43mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 235~373VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10 $^{\circ}\text{C}$ ~+60 $^{\circ}\text{C}$, 20%~90%RH

重量/包装 Weight/packing
1.26kg/20pcs/26kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-200-12	12V, 0~16.5A	$\pm 3\%$	150mV	83%
LPV-200-24	24V, 0~8.3A	$\pm 2\%$	200mV	85%
LPV-200-48	48V, 0~4.2A	$\pm 2\%$	200mV	87%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-27 235 x 120 x 56mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180~264VAC 47~63Hz 255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over- temp protection
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 切断输出,自动恢复
TSW1 $\geq 95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P: 1.5KvAC 1 minute
I/P-FG: 1.5KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10 $^{\circ}\text{C}$ ~+60 $^{\circ}\text{C}$, 20%~90%RH

重量/包装 Weight/packing
2.45kg/9pcs/23kg

型号Model	输出Output	差值Tol.	范围range	效率Efficiency
LPV-300-12	12V, 0~25A	$\pm 3\%$	150mV	83%
LPV-300-24	24V, 0~12.5A	$\pm 2\%$	200mV	85%
LPV-300-48	48V, 0~6.25A	$\pm 2\%$	200mV	87%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-31 118 x 35 x 26mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 关断输出, 用稳压二极管钳位
115~135% Shut off o/p voltage,
clamping by zener diode

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.17kg/72pcs/13kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-20E-12	12V, 0~1.67A	± 3%	120mV	81%
LPV-20E-15	15V, 0~1.33A	± 2%	120mV	83%
LPV-20E-24	24V, 0~0.84A	± 2%	150mV	83%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P26-32 148 x 40 x 30mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 373VDC

过载保护 Over load protection
110~150% 打嗝模式,自动恢复
110~150% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出, 重启恢复
115~135% cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.3kg/54pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-35E-12	12V, 0~3A	± 3%	120mV	84%
LPV-35E-15	15V, 0~2.4A	± 2%	120mV	84%
LPV-35E-24	24V, 0~1.5A	± 2%	150mV	85%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P27-33 164 x 42 x 33mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出, 重启恢复
115~135% cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.35kg/50pcs/18.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-60E-12	12V, 0~5A	± 3%	100mV	84%
LPV-60E-24	24V, 0~2.5A	± 2%	150mV	86%
LPV-60E-36	36V, 0~1.7A	± 2%	180mV	86%

LED防水恒压型

防水等级 Waterproof level
IP67



CASE: P27-35 196 x 63 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过载保护 Over load protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135% 打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C 切断输出, 自动恢复
TSW1≥85°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.8kg/20pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPV-100E-12V	12V, 0~8.5A	± 3%	100mV	83%
LPV-100E-24V	24V, 0~4.2A	± 2%	150mV	85%
LPV-100E-48V	48V, 0~2A	± 2%	150mV	86%

LED 防水恒流型

防水等级 Waterproof level
IP67



CASE: P26-31 118 x 35 x 26mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~102% 恒电流限制, 自动恢复
95~102% constant current limiting,
auto-recovery

过电压保护 Over-voltage protection
115~135% 关断输出, 用稳压二极管钳位
115~135% Shut off o/p voltage,
clamping by zener diode

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.17kg/72pcs/13kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPC-25-350	35~70V, 350mA	± 5%	200mV	84%
LPC-25-700	18~36V, 700mA	± 5%	180mV	83%
LPC-25-1050	12~24V, 1050mA	± 5%	180mV	83%
LPC-25-1400	9~18V, 1400mA	± 5%	180mV	83%

LED 防水恒流型

防水等级 Waterproof level
IP67



CASE: P26-32 148 x 40 x 30mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~102% 恒电流限制, 自动恢复
95~102% constant current limiting,
auto-recovery

过电压保护 Over-voltage protection
115~135% 关断输出, 用稳压二极管钳位
115~135% Shut off o/p voltage,
clamping by zener diode

耐压性 Withstand voltage
I/P-O/P:3KvAC 1 minute

工作温度、湿度 Working temperature
-20°C~+60°C, 20%~90%RH

重量/包装 Weight/packing
0.3kg/54pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPC-35-700	24~48V, 700mA	± 5%	200mV	85%
LPC-35-1050	15~30V, 1050mA	± 5%	200mV	85%
LPC-35-1400	12~24V, 1400mA	± 5%	200mV	85%

LED 防水恒流型

防水等级 Waterproof level
IP67



CASE: P27-33 164 x 42 x 33mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~102% 恒电流限制, 自动恢复
95~102% constant current limiting ,
auto-recovery

过电压保护 Over-voltage protection
115~135% 关断输出, 用稳压二极管钳位
115~135% Shut off o/p voltage,
clamping by zener diode

耐压性 Withstand voltage
I/P-O/P: 3KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20%~90%RH

重量/包装 Weight/packing
0.35kg/50pcs/18.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPC-60-1050	24~48V, 1050mA	± 5%	200mV	87%
LPC-60-1400	21~42V, 1400mA	± 5%	200mV	85%
LPC-60-1750	17~34V, 1750mA	± 5%	200mV	87%

LED 防水恒流型

防水等级 Waterproof level
IP67



CASE: P27-35 196 x 63 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~102% 恒电流限制, 自动恢复
95~102% constant current limiting ,
auto-recovery

过电压保护 Over-voltage protection
115~135% 关断输出, 用稳压二极管钳位
115~135% Shut off o/p voltage,
clamping by zener diode

过温保护 Over-temp protection
≥85°C ± 5°C 切断输出, 重启恢复
≥85°C ± 5°C cut off the output, restart

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC 1 minute
I/P-FG: 1.88KvAC 1 minute
O/P-FG: 0.5KvAC 1 minute

工作温度、湿度 Working temperature
-20°C ~ +60°C, 20%~90%RH

重量/包装 Weight/packing
0.8kg/20pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPC-100-1750	40~56V, 1750mA	± 5%	200mV	88%
LPC-100-2100	34~48V, 2100mA	± 5%	200mV	87%
LPC-100-2450	30~42V, 2450mA	± 5%	200mV	87%
LPC-100-2800	24~34V, 2800mA	± 5%	200mV	86%

LED 防水PFC恒流型

防水等级 Waterproof level
IP67



CASE: P26-31 118 x 35 x 26mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting ,
auto-recovery

功率因数 Power Factor
PF > 0.9/230VAC, PF > 0.92/115VAC, 输出满载
PF > 0.9/230VAC, PF > 0.92/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC 1 minute

工作温度、湿度 Working temperature
-25°C ~ +60°C, 20%~90%RH

重量/包装 Weight/packing
0.17kg/72pcs/13kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPF-20-12	7.2~12V, 1.6A	± 10%	2.0mV	81.5%
LPF-20-24	14.4~24V, 0.8A	± 10%	2.7mV	82.5%
LPF-20-36	21.6~36V, 0.55A	± 10%	3.6mV	83.5%
LPF-20-48	28.8~48V, 0.42A	± 10%	4.6mV	83.5%

LED 防水PFC恒流型

防水等级 Waterproof level
IP67



CASE: P26-31 118 x 35 x 26mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting ,
auto-recovery

功率因数 Power Factor
PF > 0.9/230VAC, PF > 0.92/115VAC, 输出满载
PF > 0.9/230VAC, PF > 0.92/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC 1 minute

工作温度、湿度 Working temperature
-25°C ~ +60°C, 20%~90%RH

重量/包装 Weight/packing
0.17kg/72pcs/13kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPF-30-12	7.2~12V, 2.5A	± 10%	2.0mV	82.5%
LPF-30-24	14.4~24V, 1.25A	± 10%	2.7mV	84.5%
LPF-30-36	21.6~36V, 0.84A	± 10%	3.6mV	85.5%
LPF-30-48	28.8~48V, 0.63A	± 10%	4.6mV	85.5%

LED 防水PFC恒流型

防水等级 Waterproof level
IP67



CASE: P26-32 148 x 40 x 30mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting , auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出, 重启恢复
115~135% cut off the output, restart

过温保护 Over-temp protection
≥90°C ± 10°C 切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart

功率因数 Power Factor
PF > 0.9/230VAC, PF > 0.92/115VAC, 输出满载
PF > 0.9/230VAC, PF > 0.92/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC

工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH

重量/包装 Weight/packing
0.3kg/54pcs/17kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPF-45-12	7.2~12V, 3.8A	± 10%	2.0mV	83.5%
LPF-45-24	14.4~24V, 1.9A	± 10%	2.7mV	86.5%
LPF-45-36	21.6~36V, 1.25A	± 10%	3.6mV	87.5%
LPF-45-48	28.8~48V, 0.95A	± 10%	4.6mV	87.5%

LED 防水PFC恒流型

防水等级 Waterproof level
IP67



CASE: P27-33 164 x 42 x 33mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或 127 ~ 370VDC

过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting , auto-recovery

过电压保护 Over-voltage protection
115~135% 切断输出, 重启恢复
115~135% cut off the output, restart

过温保护 Over-temp protection
≥90°C ± 10°C 切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart

功率因数 Power Factor
PF > 0.9/230VAC, PF > 0.92/115VAC, 输出满载
PF > 0.9/230VAC, PF > 0.92/115VAC, Output full load

耐压性 Withstand voltage
I/P-O/P: 3.75KvAC

工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH

重量/包装 Weight/packing
0.35kg/50pcs/18.5kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPF-60-12	7.2~12V, 5A	± 10%	2.0mV	85%
LPF-60-24	14.4~24V, 2.5A	± 10%	2.7mV	87%
LPF-60-36	21.6~36V, 1.7A	± 10%	3.6mV	88.5%
LPF-60-48	28.8~48V, 1.3A	± 10%	4.6mV	88.5%

LED 防水PFC恒流型

防水等级 Waterproof level
IP67



CASE: P25-23 190 × 49 × 34mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH
重量/包装 Weight/packing
0.55kg/40pcs/24kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
LPF-100-20	12~20V, 4.8A	± 10%	2.0mV	88%
LPF-100-24	14.4~24V, 4A	± 10%	2.7mV	88.5%
LPF-100-36	21.6~36V, 2.65A	± 10%	3.6mV	90%
LPF-100-48	28.8~48V, 2A	± 10%	4.6mV	90%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-34 186 × 63 × 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥95°C ± 10°C切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.95/230VAC, PF > 0.97/115VAC, 输出满载
PF > 0.95/230VAC, PF > 0.97/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C ~ +70°C, 20%~90%RH
重量/包装 Weight/packing
0.7kg/20pcs/15kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
CEN-75-24	16~24V, 3.15A	± 10%	2.4mV	89%
CEN-75-36	24~36V, 2.1A	± 10%	3.6mV	90%
CEN-75-42	27~42V, 1.8A	± 10%	4.0mV	90%
CEN-75-48	32~48V, 1.6A	± 10%	4.6mV	91%
CEN-75-54	36~54V, 1.4A	± 10%	5.0mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-35 196 × 63 × 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥95°C ± 10°C切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.95/230VAC, PF > 0.97/115VAC, 输出满载
PF > 0.95/230VAC, PF > 0.97/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C ~ +70°C, 20%~90%RH
重量/包装 Weight/packing
0.75kg/20pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
CEN-120-24	16~24V, 5.0A	± 10%	2.4mV	89%
CEN-120-36	24~36V, 3.4A	± 10%	3.6mV	90%
CEN-120-42	27~42V, 2.9A	± 10%	4.0mV	90%
CEN-120-48	32~48V, 2.5A	± 10%	4.6mV	91%
CEN-120-54	36~54V, 2.3A	± 10%	5.0mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-34 186 × 63 × 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥95°C ± 10°C切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.95/230VAC, PF > 0.97/115VAC, 输出满载
PF > 0.95/230VAC, PF > 0.97/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C ~ +70°C, 20%~90%RH
重量/包装 Weight/packing
0.7kg/20pcs/15kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
CEN-60-24	16~24V, 2.5A	± 10%	2.4mV	89%
CEN-60-36	24~36V, 1.7A	± 10%	3.6mV	90%
CEN-60-42	27~42V, 1.45A	± 10%	4.0mV	90%
CEN-60-48	32~48V, 1.3A	± 10%	4.6mV	91%
CEN-60-54	36~54V, 1.15A	± 10%	5.0mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-35 196 × 63 × 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥95°C ± 10°C切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.95/230VAC, PF > 0.97/115VAC, 输出满载
PF > 0.95/230VAC, PF > 0.97/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C ~ +70°C, 20%~90%RH
重量/包装 Weight/packing
0.75kg/20pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
CEN-100-24	16~24V, 4.0A	± 10%	2.4mV	89%
CEN-100-36	24~36V, 2.65A	± 10%	3.6mV	90%
CEN-100-42	27~42V, 2.3A	± 10%	4.0mV	90%
CEN-100-48	32~48V, 2.0A	± 10%	4.6mV	91%
CEN-100-54	36~54V, 1.8A	± 10%	5.0mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-35 196 × 63 × 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180 ~ 264VAC 47 ~ 63Hz或255 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥95°C ± 10°C切断输出, 重启恢复
≥95°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.95/230VAC, 输出满载
PF > 0.95/230VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C ~ +70°C, 20%~90%RH
重量/包装 Weight/packing
0.75kg/20pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
CEN-150-24	16~24V, 6.0A	± 10%	2.4mV	89%
CEN-150-36	24~36V, 4.2A	± 10%	3.6mV	90%
CEN-150-42	27~42V, 3.6A	± 10%	4mV	90%
CEN-150-48	32~48V, 3.2A	± 10%	4.6mV	91%
CEN-150-54	36~54V, 2.8A	± 10%	5mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-36 231 x 69 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~108% 恒电流限制, 自动恢复
95~108% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥105°C ± 10°C切断输出, 重启恢复
≥105°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF> 0.95/230VAC, PF> 0.98/115VAC, 输出满载
PF> 0.95/230VAC, PF> 0.98/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C~+60°C, 20%~90%RH
重量/包装 Weight/packing
1.05kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
HLG-100-24	16~24V, 4.0A	±10%	2.4mV	89%
HLG-100-36	24~36V, 2.65A	±10%	3.6mV	90%
HLG-100-42	27~42V, 2.3A	±10%	4.0mV	90%
HLG-100-48	32~48V, 2.0A	±10%	4.6mV	91%
HLG-100-54	36~54V, 1.8A	±10%	5.0mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-36 231 x 69 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~108% 恒电流限制, 自动恢复
95~108% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥105°C ± 10°C切断输出, 重启恢复
≥105°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF> 0.95/230VAC, PF> 0.98/115VAC, 输出满载
PF> 0.95/230VAC, PF> 0.98/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C~+60°C, 20%~90%RH
重量/包装 Weight/packing
1.05kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
HLG-150-24	12~24V, 6.3A	±1%	150mV	93%
HLG-150-36	18~36V, 4.2A	±1%	200mV	93%
HLG-150-42	21~42V, 3.6A	±1%	200mV	94%
HLG-150-48	24~48V, 3.2A	±1%	200mV	94%
HLG-150-54	27~54V, 2.8A	±1%	200mV	94%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-37 247 x 69 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~108% 恒电流限制, 自动恢复
95~108% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥105°C ± 10°C切断输出, 重启恢复
≥105°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF> 0.95/230VAC, PF> 0.98/115VAC, 输出满载
PF> 0.95/230VAC, PF> 0.98/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C~+60°C, 20%~90%RH
重量/包装 Weight/packing
1.15kg/20pcs/24kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
HLG-240-24	12~24V, 10A	±1%	150mV	93.5%
HLG-240-36	18~36V, 6.7A	±1%	200mV	93.5%
HLG-240-42	21~42V, 5.72A	±1%	200mV	94%
HLG-240-48	24~48V, 5A	±1%	200mV	94%
HLG-240-54	27~54V, 4.45A	±1%	200mV	94%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-36 231 x 69 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~108% 恒电流限制, 自动恢复
95~108% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥105°C ± 10°C切断输出, 重启恢复
≥105°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF> 0.95/230VAC, PF> 0.98/115VAC, 输出满载
PF> 0.95/230VAC, PF> 0.98/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C~+60°C, 20%~90%RH
重量/包装 Weight/packing
1.05kg/20pcs/22kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
HLG-100-24	16~24V, 5.0A	±10%	2.4mV	89%
HLG-100-36	24~36V, 3.4A	±10%	3.6mV	90%
HLG-100-42	27~42V, 2.9A	±10%	4.0mV	90%
HLG-100-48	32~48V, 2.5A	±10%	4.6mV	91%
HLG-100-54	36~54V, 2.3A	±10%	5.0mV	91%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-37 247 x 69 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~108% 恒电流限制, 自动恢复
95~108% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥105°C ± 10°C切断输出, 重启恢复
≥105°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF> 0.95/230VAC, PF> 0.98/115VAC, 输出满载
PF> 0.95/230VAC, PF> 0.98/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C~+60°C, 20%~90%RH
重量/包装 Weight/packing
1.15kg/20pcs/24kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
HLG-185-24	12~24V, 7.8A	±1%	150mV	93.5%
HLG-185-36	18~36V, 5.2A	±1%	200mV	93.5%
HLG-185-42	21~42V, 4.4A	±1%	200mV	94%
HLG-185-48	24~48V, 3.9A	±1%	200mV	94%
HLG-185-54	27~54V, 3.45A	±1%	200mV	94%

LED 防水PFC可调型

防水等级 Waterproof level
IP65



CASE: P27-37 247 x 69 x 39mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~108% 恒电流限制, 自动恢复
95~108% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥105°C ± 10°C切断输出, 重启恢复
≥105°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF> 0.95/230VAC, PF> 0.98/115VAC, 输出满载
PF> 0.95/230VAC, PF> 0.98/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3.75KvAC I/P-FG: 1.88KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-30°C~+60°C, 20%~90%RH
重量/包装 Weight/packing
1.15kg/20pcs/24kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
HLG-320-24	12~24V, 13.5A	±1%	150mV	93.5%
HLG-320-36	18~36V, 8.9A	±1%	200mV	93.5%
HLG-320-42	21~42V, 7.6A	±1%	200mV	94%
HLG-320-48	24~48V, 6.6A	±1%	200mV	94%
HLG-320-54	27~54V, 6.0A	±1%	200mV	94%

LED 防雨恒压型

防水等级 Waterproof level
IP44



CASE: P26-29 206 × 125 × 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
85~132VAC 170~264Hz 47~63Hz 240~370VDC

过载保护 Over load protection
105~150% 打嗝模式,自动恢复
105~150%hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C 切断输出,自动恢复
TSW1≥85°C ± 5°C out off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~60°C,20~90%RH

重量/包装 Weight/packing
0.45kg/45pcs/20.25kg

型号Model	输出Output	差值Tol.	范围range	效率Efficiency
FS-100-12	12V, 0~8.3A	± 1%	150mV	82%
FS-100-24	24V, 0~4.2A	± 1%	150mV	83%
FS-100-48	48V, 0~2.1A	± 1%	200mV	84%

LED 防雨恒压型

防水等级 Waterproof level
IP44



CASE: P26-29 206 × 125 × 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 240~370VDC

过载保护 Over load protection
105~150% 打嗝模式,自动恢复
105~150%hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C 切断输出,自动恢复
TSW1≥85°C ± 5°C out off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~60°C,20~90%RH

重量/包装 Weight/packing
0.9kg/20pcs/19kg

型号Model	输出Output	差值Tol.	范围range	效率Efficiency
FS-200-12	12V, 0~16.6A	± 1%	150mV	82%
FS-200-24	24V, 0~8.3A	± 1%	150mV	84%
FS-200-48	48V, 0~4.2A	± 1%	200mV	86%

LED 防雨恒压型

防水等级 Waterproof level
IP44



CASE: P26-30 236 × 135 × 65mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180~264VAC 47~63Hz, 255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C切断输出,自动恢复
TSW1≥85°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~60°C,20~90%RH

重量/包装 Weight/packing
1.4kg/12pcs/18kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
FS-350-12	12V, 0~29A	± 1%	150mV	82%
FS-350-15	15V, 0~23.2A	± 1%	150mV	83%
FS-350-24	24V, 0~14.6A	± 1%	200mV	84%

LED 防雨恒压型

防水等级 Waterproof level
IP44



CASE: P26-29 206 × 125 × 50mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
170~264VAC 47~63Hz 240~370VDC

过载保护 Over load protection
105~150% 打嗝模式,自动恢复
105~150%hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C 切断输出,自动恢复
TSW1≥85°C ± 5°C out off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~60°C,20~90%RH

重量/包装 Weight/packing
0.5kg/45pcs/22.5kg

型号Model	输出Output	差值Tol.	范围range	效率Efficiency
FS-150-12	12V, 0~12.5A	± 1%	150mV	82%
FS-150-24	24V, 0~6.25A	± 1%	150mV	83%
FS-150-48	48V, 0~3.2A	± 1%	200mV	84%

LED 防雨恒压型

防水等级 Waterproof level
IP44



CASE: P26-30 236 × 135 × 65mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180~264VAC 47~63Hz 255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135%hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C 切断输出,自动恢复
TSW1≥85°C ± 5°C out off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~60°C,20~90%RH

重量/包装 Weight/packing
1.4kg/12pcs/18kg

型号Model	输出Output	差值Tol.	范围range	效率Efficiency
FS-250-12	12V, 0~20A	± 1%	150mV	82%
FS-250-24	24V, 0~10A	± 1%	150mV	83%
FS-250-48	48V, 0~5A	± 1%	200mV	84%

LED 防雨恒压型

防水等级 Waterproof level
IP44



CASE: P26-30 236 × 135 × 65mm

质保期2年
2 Years Warranty

输入电压范围 AC input voltage range
180~264VAC 47~63Hz, 255~373VDC

过载保护 Over load protection
105~135% 打嗝模式,自动恢复
105~135% hiccup mode, auto-recovery

过电压保护 Over-voltage protection
115~135%打嗝模式,自动恢复
115~135% hiccup mode, auto-recovery

过温保护 Over-temp protection
TSW1≥85°C ± 5°C切断输出,自动恢复
TSW1≥85°C ± 5°C cut off the output, auto-recovery

耐压性 Withstand voltage
I/P-O/P:1.5KvAC 1 minute
I/P-FG:1.5KvAC 1 minute
O/P-FG:0.5KvAC 1 minute

工作温度、湿度 Working temperature
-10°C~60°C,20~90%RH

重量/包装 Weight/packing
1.4kg/12pcs/18kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
FS-400-12	12V, 0~33A	± 1%	150mV	82%
FS-400-15	15V, 0~27A	± 1%	150mV	82%
FS-400-24	24V, 0~16.5A	± 1%	200mV	84%

LED 基板式开关电源



CASE: P28-45 107 × 61 × 28mm

质保期2年

2 Years Warranty

输入电压范围 AC input voltage range
85 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3KvAC I/P-FG: 2KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH
重量/包装 Weight/packing
0.14kg/96pcs/15kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
PS-25-3.3	3.3V, 0~5A	± 3.0%	80mV	66%
PS-25-5	5V, 0~5A	± 2.0%	80mV	74%
PS-25-12	12V, 0~2.1A	± 2.0%	100mV	78%
PS-25-24	24V, 0~1A	± 2.0%	240mV	79%

LED 基板式开关电源



CASE: P28-47 127 × 76 × 42mm

质保期2年

2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3KvAC I/P-FG: 2KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH
重量/包装 Weight/packing
0.21kg/60pcs/14.6kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
PS-65-3.3	3.3V, 0~13A	± 3.0%	80mV	69%
PS-65-5	5V, 0~12A	± 3.0%	100mV	76%
PS-65-12	12V, 0~5.2A	± 2.0%	100mV	79%
PS-65-24	24V, 0~2.7A	± 2.0%	100mV	80%

LED 基板式开关电源



CASE: P28-46 127 × 76 × 28mm

质保期2年

2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3KvAC I/P-FG: 2KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-10°C ~ +60°C, 20%~90%RH
重量/包装 Weight/packing
0.2kg/72pcs/16kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
PD-45A	CH1, 5V, 0.4~5A	± 1.0%	50mV	77%
	CH2, 12V, 0.2~2.5A	± 2.0%	120mV	
PD-45B	CH1, 5V, 0.4~5A	± 1.0%	50mV	78%
	CH2, 12V, 0.2~1.8A	± 2.0%	150mV	

LED 基板式开关电源



CASE: P28-46 127 × 76 × 28mm

质保期2年

2 Years Warranty

输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3KvAC I/P-FG: 2KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-10°C ~ +60°C, 20%~90%RH
重量/包装 Weight/packing
0.19kg/72pcs/15.6kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
PS-45-3.3	3.3V, 0~10A	± 3.0%	80mV	69%
PS-45-5	5V, 0~9A	± 3.0%	100mV	74%
PS-45-12	12V, 0~3.7A	± 2.0%	100mV	76%
PS-45-24	24V, 0~1.9A	± 2.0%	100mV	78%

LED 基板式开关电源



CASE: P28-45 107 × 61 × 28mm

质保期2年

2 Years Warranty

输入电压范围 AC input voltage range
85 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3KvAC I/P-FG: 2KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH
重量/包装 Weight/packing
0.15kg/96pcs/15.9kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
PD-25A	CH1, 5V, 0~2.1A	± 2.0%	50mV	71%
	CH2, 12V, 0~1.5A	± 2.0%	150mV	
PD-25B	CH1, 5V, 0.2~2A	± 2.0%	50mV	77%
	CH2, 24V, 0.1~1A	± 2.0%	200mV	
PD-2505	CH1, 5V, 0.1~3A	± 2.0%	50mV	73%
	CH2, -5V, 0.1~2.5A	± 2.0%	50mV	

LED 基板式开关电源



CASE: P28-47 127 × 76 × 42mm

质保期2年

2 Years Warranty


输入电压范围 AC input voltage range
90 ~ 264VAC 47 ~ 63Hz或127 ~ 370VDC
过电流保护 Overcurrent protection
95~110% 恒电流限制, 自动恢复
95~110% constant current limiting, auto-recovery
过电压保护 Over-voltage protection
115~135%切断输出, 重启恢复
115~135% cut off the output, restart
过温保护 Over- temp protection
≥90°C ± 10°C切断输出, 重启恢复
≥90°C ± 10°C cut off the output, restart
功率因数 Power Factor
PF > 0.92/230VAC, PF > 0.95/115VAC, 输出满载
PF > 0.92/230VAC, PF > 0.95/115VAC, Output full load
耐压性 Withstand voltage
I/P-O/P: 3KvAC I/P-FG: 2KvAC
O/P-FG: 0.5KvAC 1 minute
工作温度、湿度 Working temperature
-25°C ~ +50°C, 20%~90%RH
重量/包装 Weight/packing
0.24kg/60pcs/16.4kg

型号Model	输出Output	差值Tol.	范围Range	效率Efficiency
PD-65A	CH1, 5V, 0.4~7A	± 1.0%	50mV	78%
	CH2, 12V, 0.2~3.2A	± 2.0%	120mV	
PD-65B	CH1, 5V, 0.4~6A	± 1.0%	50mV	81%
	CH2, 24V, 0.2~2.6A	± 2.0%	150mV	

01

99 × 97 × 35mm


S-15W
S-25W
NES-35W

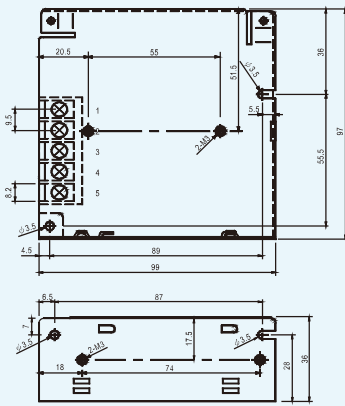

02

129 × 98 × 38mm


S-35W MS-100E
S-40W MS-120E
D-30W MS-150E
T-30W NES-50W
AD-55
ADD-55

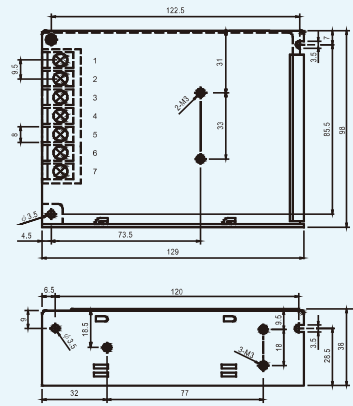

03

159 × 97 × 38mm


S-50W MS-100W
S-60W MS-120W
S-75W MS-150W
D-50W MS-200E
D-60W NES-75W
T-50W NES-100W
T-60W NES-120W
Q-60W

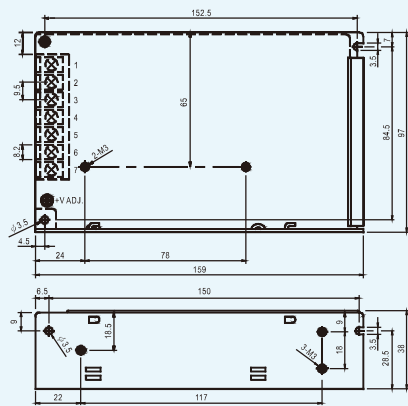

04


199 × 98 × 38mm

S-100W
S-120W
S-150W
MS-200W
NES-150W

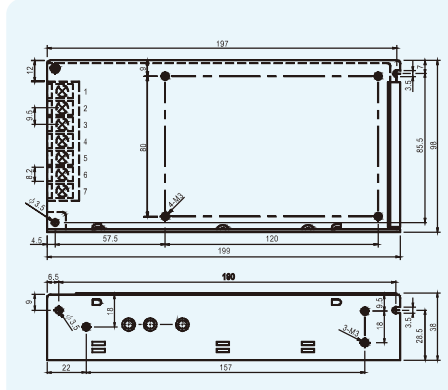

05


215 × 115 × 50mm

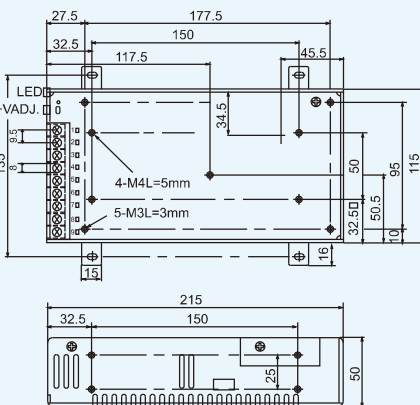

06

215 × 115 × 50mm


S-320W
S-350W
S-400W
SP-320W
NES-480W
MS-500W

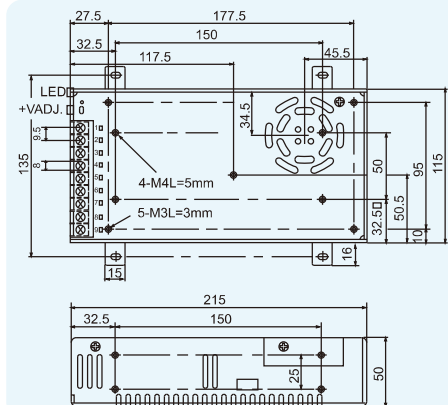

07

247 × 127 × 63.5mm


S-800W

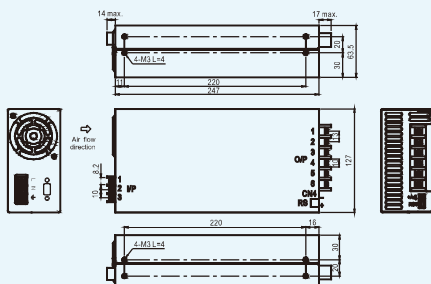


08

199 × 99 × 48mm


SP-150W
NES-200W
NES-250W

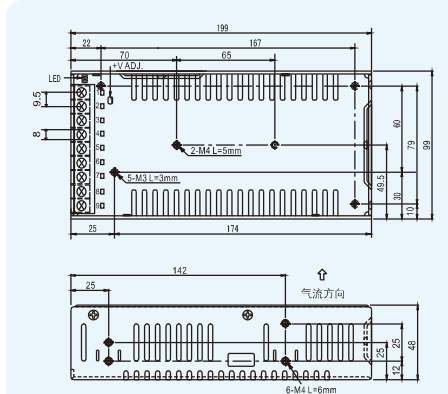


SP-200W
MS-350W
NES-350W
MS-400W

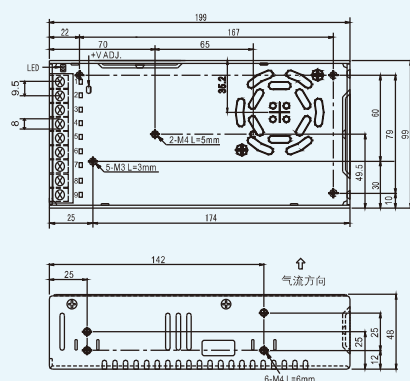


SP-500W

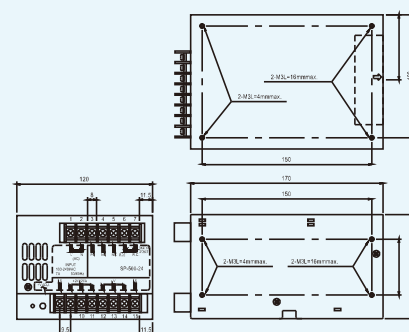


SCN-800W
SCN-1000W

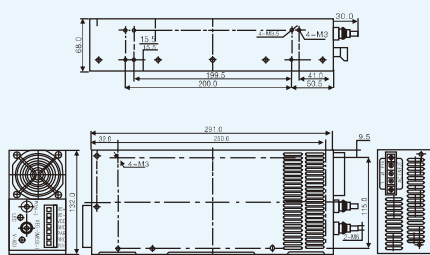


SCN-1200W
SCN-1600W

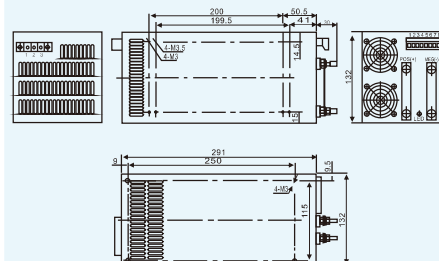


D-120W
T-120W
Q-120W
S-200W
S-250W
AD-155
ADD-155
ADS-155

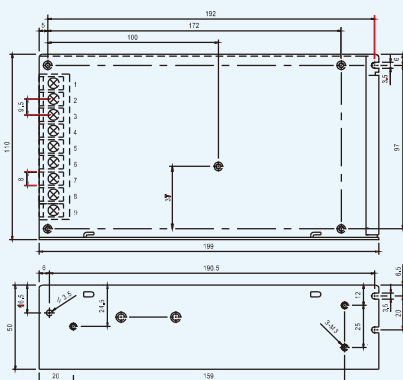


MSF-10W

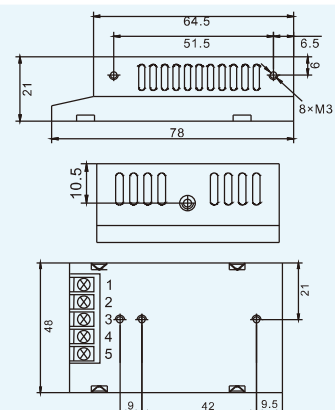


MS-15W
MS-25W
MS-35W
MS-40W
MS-50E
NES-15W
NES-25W

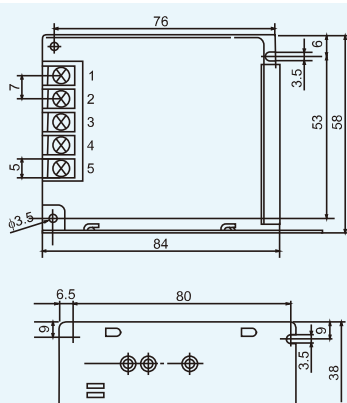


MSF-20W

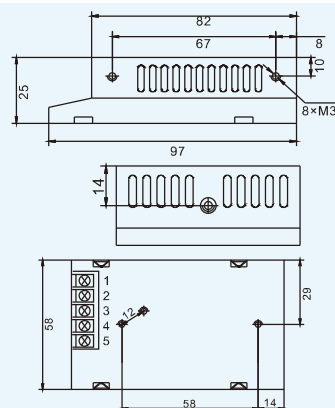


MS-50W
MS-60W
MS-75W
NES-35W
NES-50W

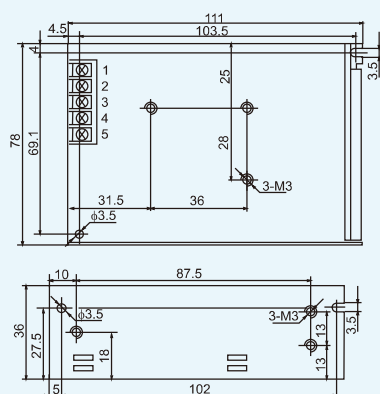


MS-250W

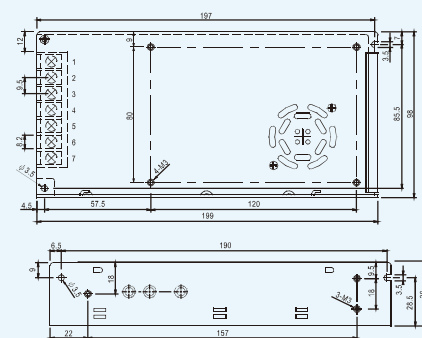


S-500W
S-600W

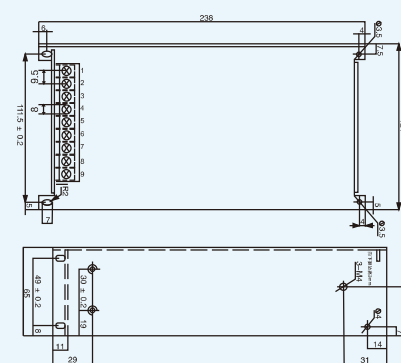


LPV-12W




LPV-20W

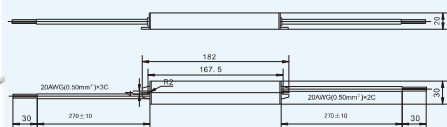


LPV-30W

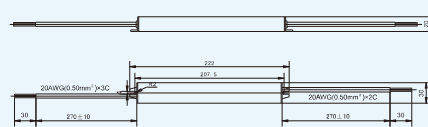

LPV-50W
LPV-60W
LPV-80W
LPF-100W

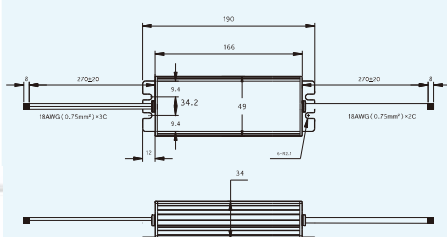


LPV-100W

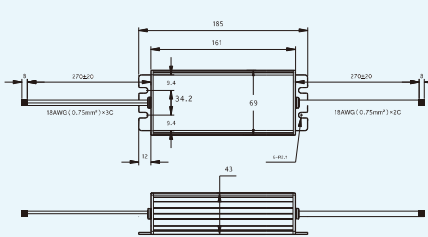


25 215 × 69 × 43mm

LPV-120W

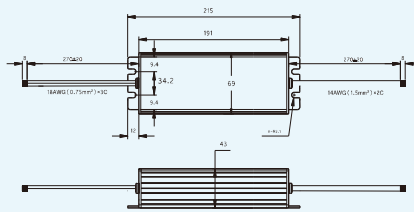


26 240 × 69 × 43mm

LPV-150W
LPV-200W

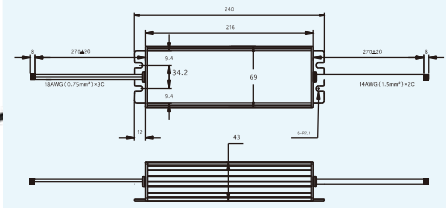


27 235 × 120 × 56mm

LPV-250W
LPV-300W

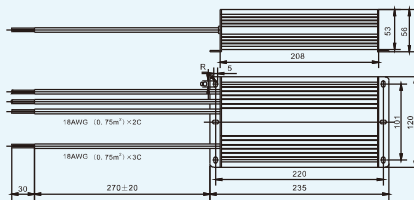


28 141 × 111 × 50mm

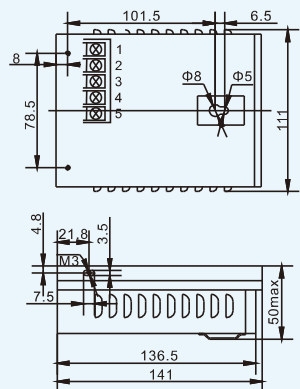


29 206 × 125 × 50mm

FS-100W
FS-150W
FS-200W

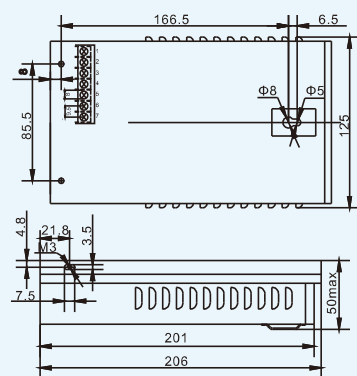


30 236 × 135 × 65mm

FS-250W
FS-350W
FS-400W

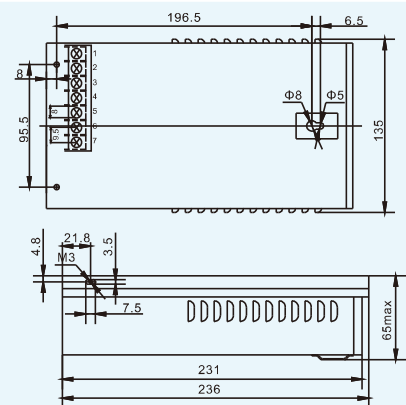


31 118 × 35 × 26mm

LPV-20E
LPC-25W
LPF-20W
LPF-30W

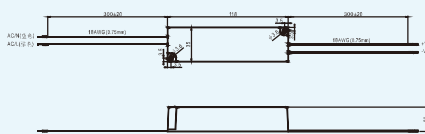


32 148 × 40 × 30mm

LPV-35E
LPC-35W
LPF-45W

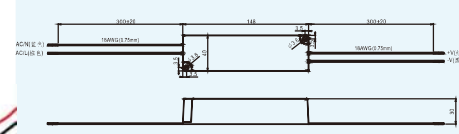


33 164 × 42 × 33mm

LPV-60E
LPC-60W
LPF-60W

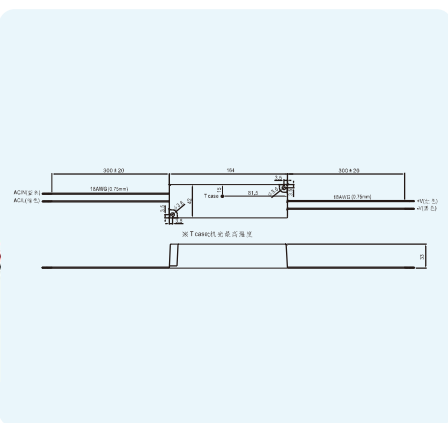


34 196 × 63 × 39mm

CEN-60W
CEN-75W

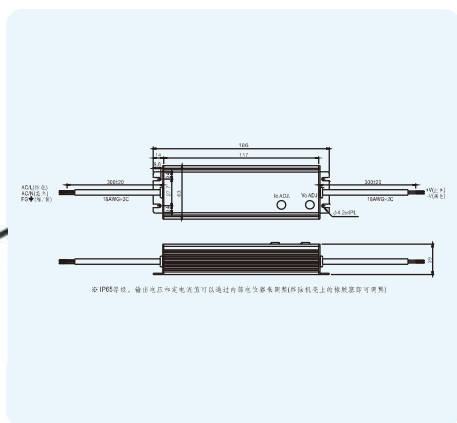


35 196 × 63 × 39mm

LPV-100E
LPC-100W
CEN-100W
CEN-120W
CEN-150W

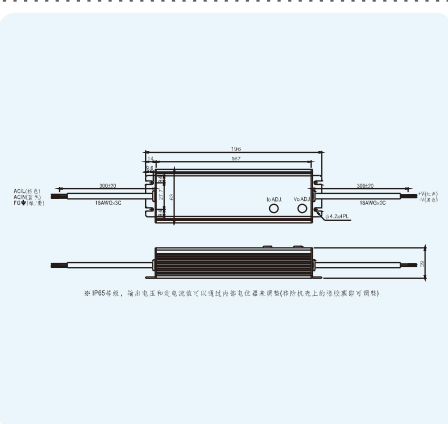


36 231 × 69 × 39mm

HLG-100W
HLG-120W
HLG-150W

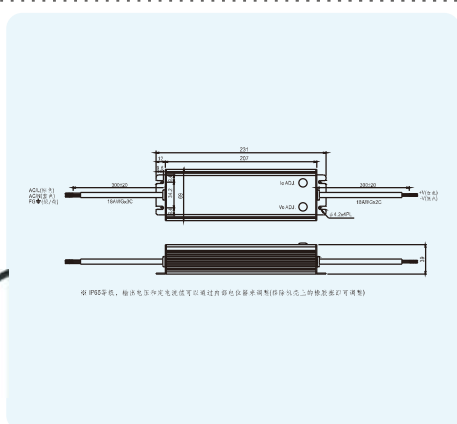


37 247 × 69 × 39mm

HLG-185W
HLG-240W
HLG-320W

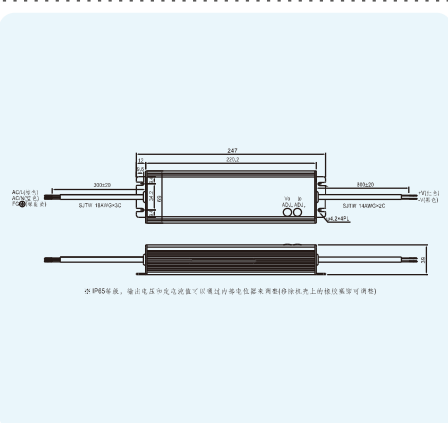


38 111 × 78 × 36mm

SC-35W

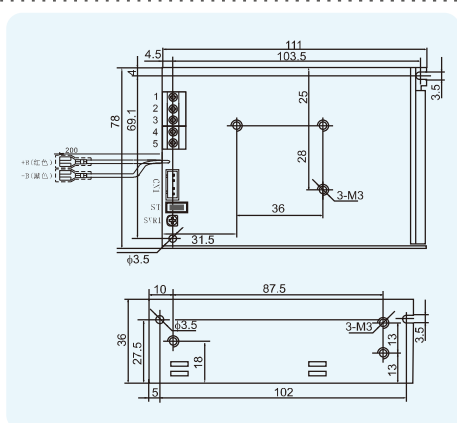


39 129 × 98 × 38mm

SC-60W

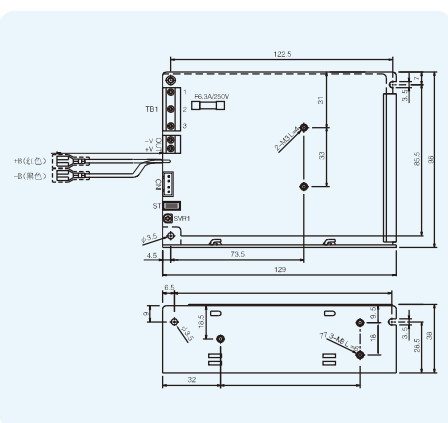


40 159 × 97 × 38mm

SC-120W

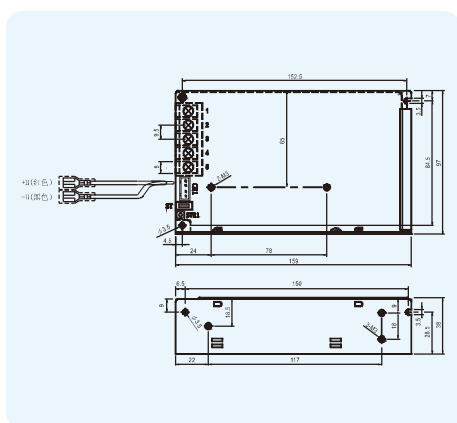


41 78 × 93 × 56mm

DR-45W
DR-60W

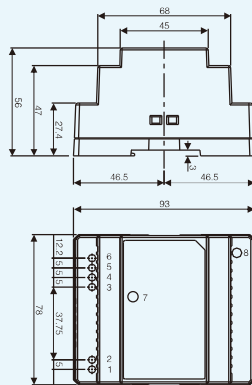


42 55.5 × 125 × 100mm

DR-75W

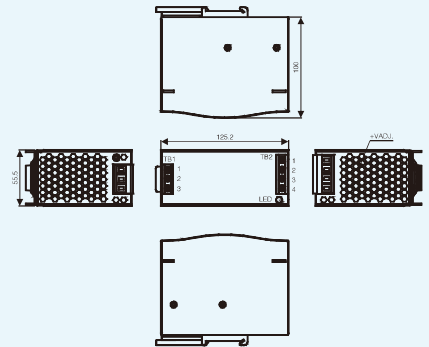


43 65.5 × 125 × 100mm

DR-120W

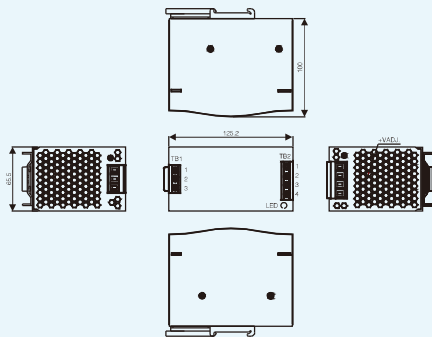


44 125.5 × 125 × 100mm

DR-240W
DR-480W

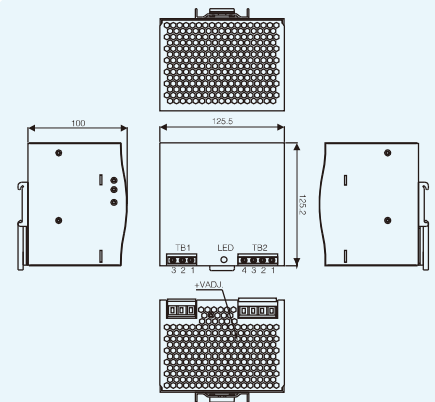


45 107 × 61 × 28mm

PS-25W
PD-25W

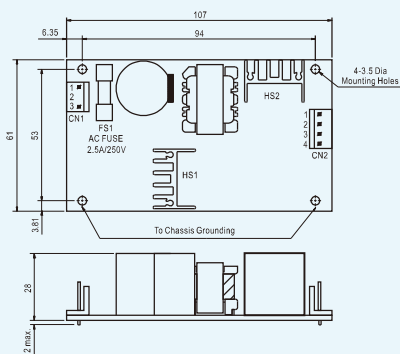


46 127 × 76 × 28mm

PS-45W
PD-45W

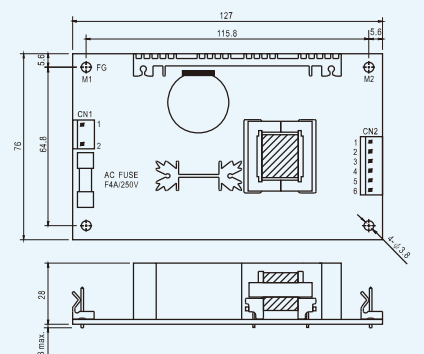

47 127 × 76 × 42mm

PS-65W
PD-65W

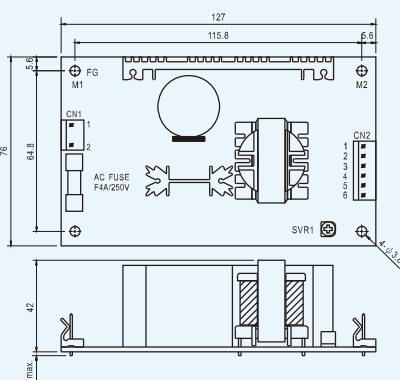

.....