



AH2 series

Multi-range Delay-on timer

The AH2 series analogue timer is a time-limited type of timer. It have a variety of time setting ranges and voltages you can choose, it mainly used for equipment control.

Mounting & Socket:
Surface (-N) : PF083A (E) / PS-08
Flush (-Y) : US-08 / P3G-08

Description

- Multi-range analogue timer
- Customized CMOS IC for low power consumption, high operation stability and extreme timing accuracy
- 15 different time ranges available, from 0.1sec to 24hour
- Large transparent knob for easy adjustment and monitoring

Product selection


Type	Output contact	Time range	Operation voltage
AH2-N1	1C	Second:1/3/6/10/12/30/60S Minute:3/6/12/30/60M Hour:3/6/10/24H	DC (V) : 12,24
AH2-Y1			
AH2-N2	2C		AC (V) : 12, 24, 110, 220, 240 50/60Hz
AH2-Y2			
AH2-N	1A 1C		Allowable 85~110% of rated operating voltage
AH2-Y			

Technical date

Indicator operating	ON-UP Two indicator lamp	
Contact rating	250VAC 5A (resistive load)	
Life	Mechanical	5×10 ⁶ times
	Electrical	1×10 ⁵ times


Accuracy	Repeat error	±1.0%max
	Setting error	±10.0%max
	Voltage error	±1.0%max
	Temperature error	±2.0%max
Reset time	Max 0.1sec	
Insulation resistance	100MΩ (DC 500V) min	
Class of protection	1500VAC	
Permitted ambient temperature	-10 ~ +50 °C (non-icing)	
Power consumption	3VA	

Wiring diagram & Timing chart

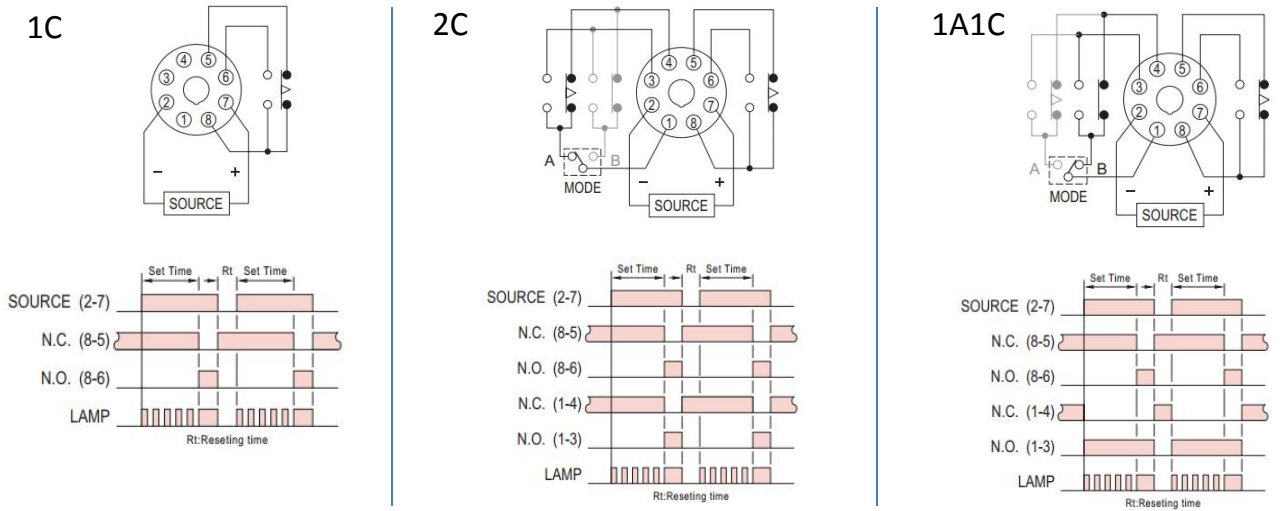

Dimensions

N type

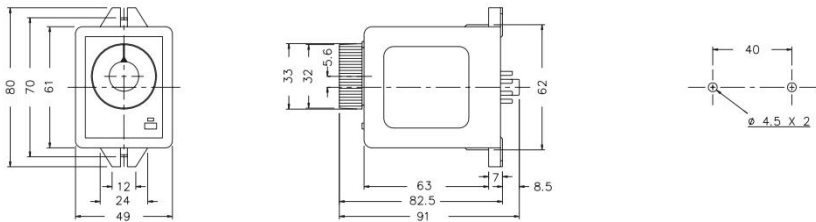

Y type

